

Nighthawk

Exterior Spotlight

The Nighthawk offers powerful illumination and can withstand the Aussie weather through its durable design. Feel extra secure with our 'with sensor' options.

SINGLE

SINGLE

DOUBLE

DOUBLE

With Sensor

With Sensor

SINGLE
NO SENSOR



AVAILABLE IN BLACK



SINGLE
WITH SENSOR



AVAILABLE IN BLACK



DOUBLE
NO SENSOR



AVAILABLE IN BLACK



DOUBLE
WITH SENSOR



AVAILABLE IN BLACK







Ribbed Detailing



(07) 3711 8833
calibo.com.au



	Single	Single with Sensor	Double	Double with Sensor
Wattage	15W	15W	2 x 15W	2 x 15W
Light Source	LED Dedicated			
Colour Temperature	3000K - 4000K - 5000K			
Sensor	No	Integrated Microwave Sensor up to 10M Range* *For optimum distance, wall mounted 2.4m above floor level.	No	Integrated Microwave Sensor up to 10M Range* *For optimum distance, wall mounted 2.4m above floor level.
Lumen Output	1100lm - 1250lm - 1150lm	1100lm - 1250lm - 1150lm	2000lm - 2500lm - 2400lm	2000lm - 2500lm - 2400lm
Lumen Output / W	83.33			
Dimmable	No			
IP Rating	IP65			
Electrical Protection	Class II			
Materials	Polycarbonate			
Warranty	3 Years			
Gross Weight	0.45kg	0.49kg	0.6kg	0.63kg
Net Weight	0.35kg	0.39kg	0.48kg	0.52kg
Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS 61347.2.11, AS/NZS CISPR 15, AS/NZS 4268	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS 61347.2.11, AS/NZS CISPR 15, AS/NZS 4268

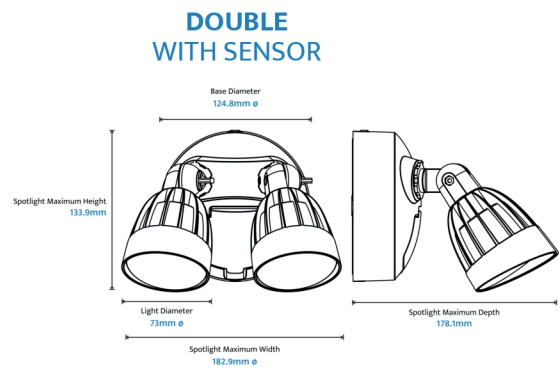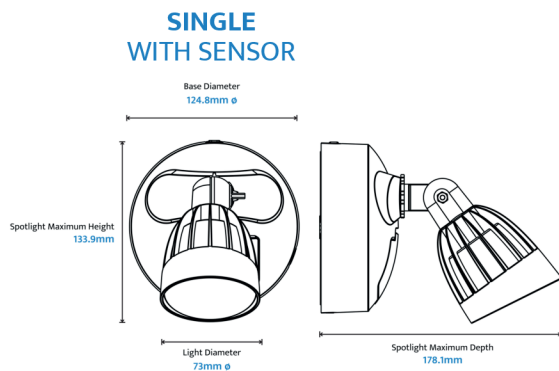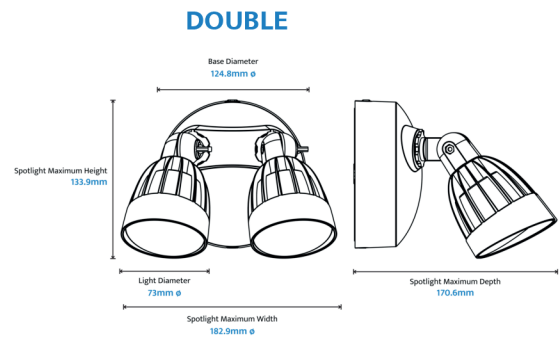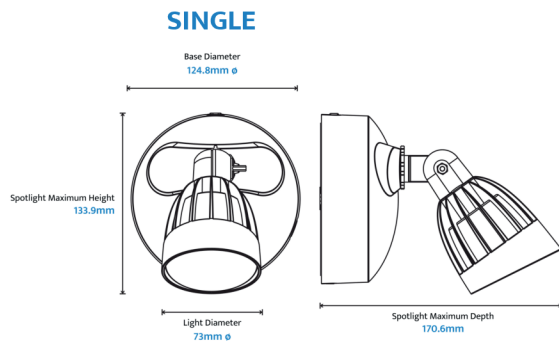

	Single	Single with Sensor	Double	Double with Sensor
Black	NIG-1SL-15W-BK	NIG-1SL-15W-BK-S	NIG-2SL-30W-BK	NIG-2SL-30W-BK-S
White	NIG-1SL-15W-WH	NIG-1SL-15W-WH-S	NIG-2SL-30W-WH	NIG-2SL-30W-WH-S