

Aquila AQU-150LN-24W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Ash with White, Black Ash with Black, Walnut with Black	Temperature Rating	-20°C +25°C
Wattage	24W	Construction	Ash Wood & Aluminium
Dimmable	Yes - Triac Dimmable	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	1289lm - 1391lm - 1326lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	17650h L80	NZ/AU Driver Driver Type	LF-GIF040YS080H Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	3.2KG 4.3KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



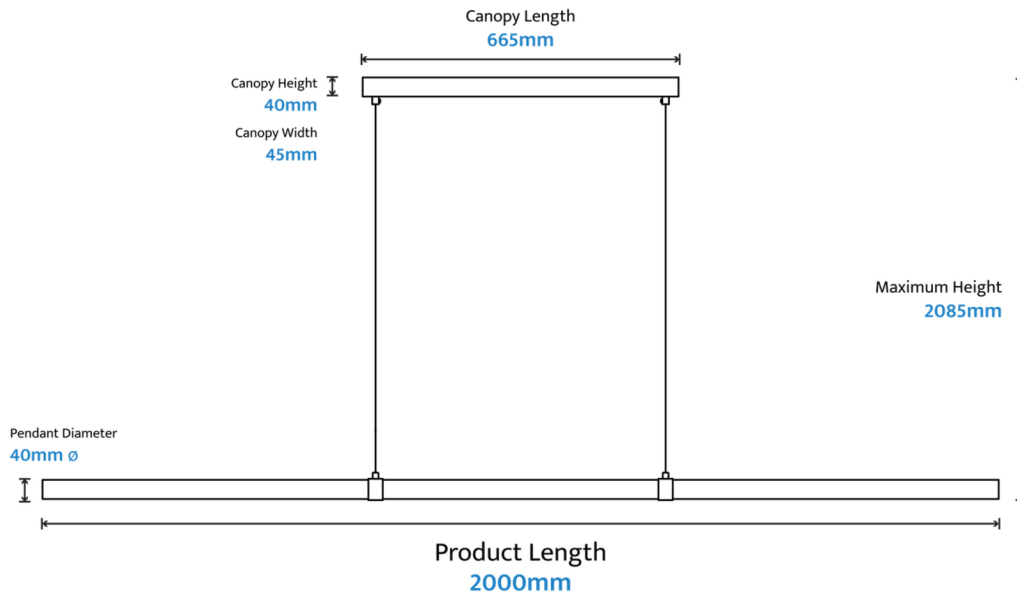

Aquila AQU-200LN-32W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Ash with White, Black Ash with Black, Walnut with Black	Temperature Rating	-20°C +25°C
Wattage	32W	Construction	Ash Wood & Aluminium
Dimmable	Yes - Triac Dimmable	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	1789lm - 1868lm - 1661lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI \geq 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	17650h L80	NZ/AU Driver Driver Type	LF-GIF040YS080H Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	4.2KG 5.3KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

