


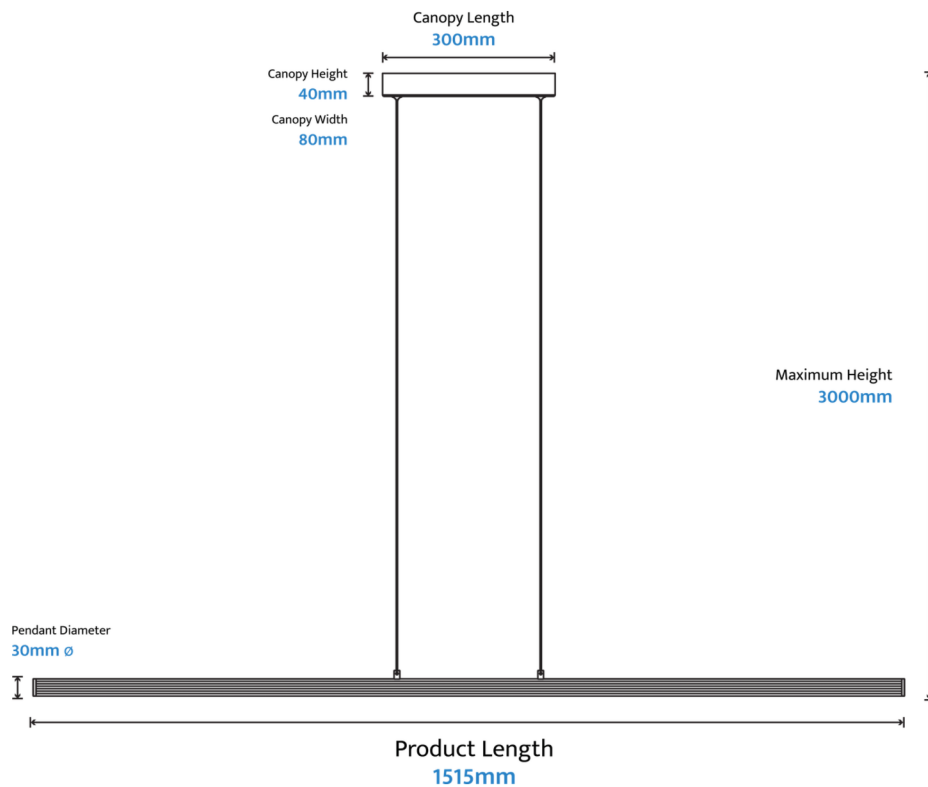

Aeris AER-150LN-52W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C~+40°C
Wattage	52W	Construction	Aluminium & Silicone
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	3120lm - 3248lm - 3328lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥90	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	FLS-60-1700 LA EXC Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	1.9KG 3.5KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



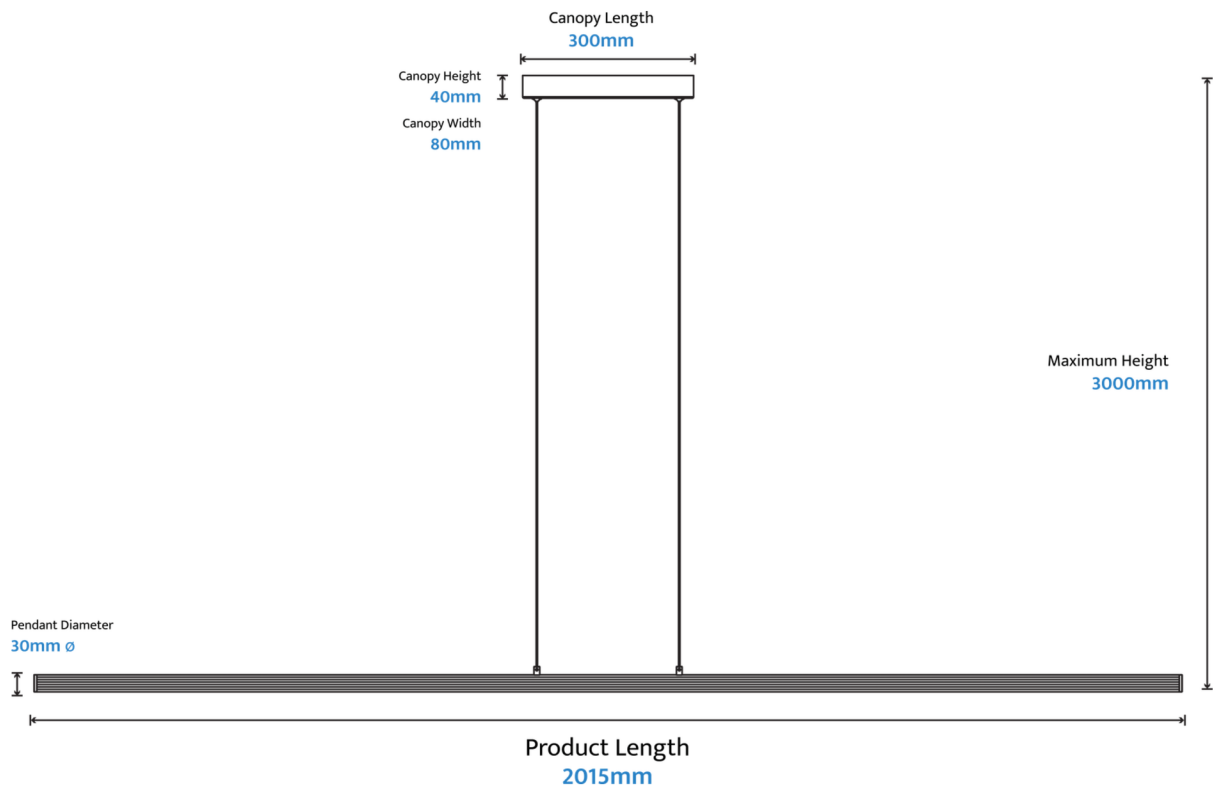

Aeris AER-200LN-62W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C~+40°C
Wattage	62W	Construction	Aluminium & Silicone
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	3780lm - 3838lm - 3900lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥90	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	FLS-60-1700 LA EXC Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	2.6KG 5KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



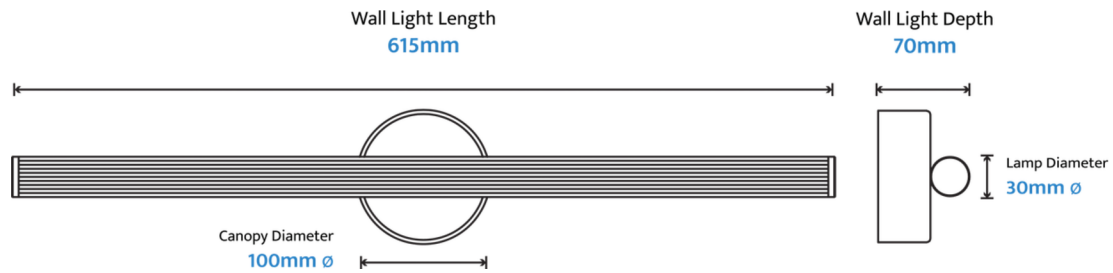

Aeris AER-60WL-21W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C~+40°C
Wattage	21W	Construction	Aluminium & Silicone
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	1433lm - 1528lm - 1553lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥90	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	CS-24-600 LI1 Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	0.65KG 1KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



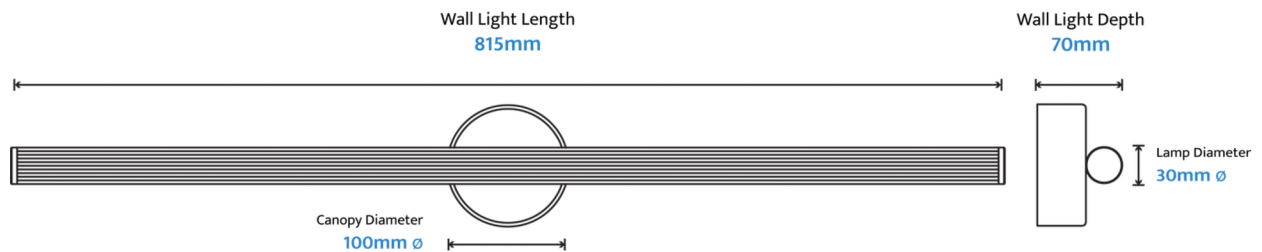

Aeris AER-80WL-28W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C~+40°C
Wattage	28W	Construction	Aluminium & Silicone
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	1536lm - 1707lm - 1717lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥90	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	CS-42-800 LI1 Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	0.8KG 1.3KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



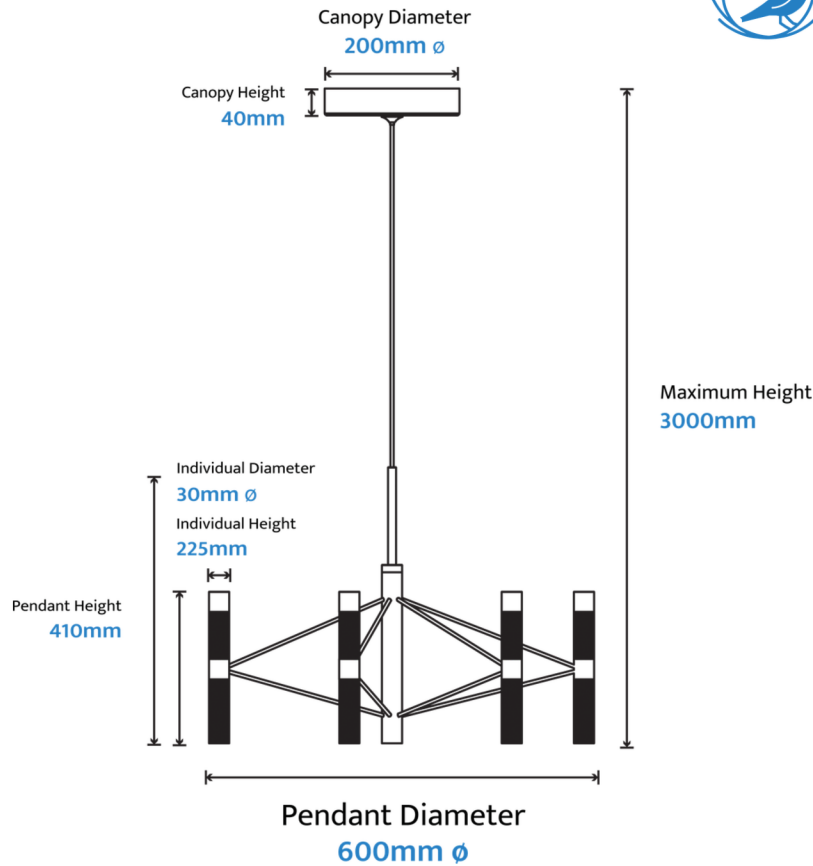

Aeris AER-7PN-60-57W Specifications

Light Source	LED SMD2835+COB	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C~+40°C
Wattage	57W	Construction	Aluminium & Silicone
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	3575lm - 3910lm - 3949lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥90	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	LS-40-800 LI EXC S Constant C, Isolated
Beam Angle	120° 24°	Net Weight Gross Weight	2.6KG 6.5KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



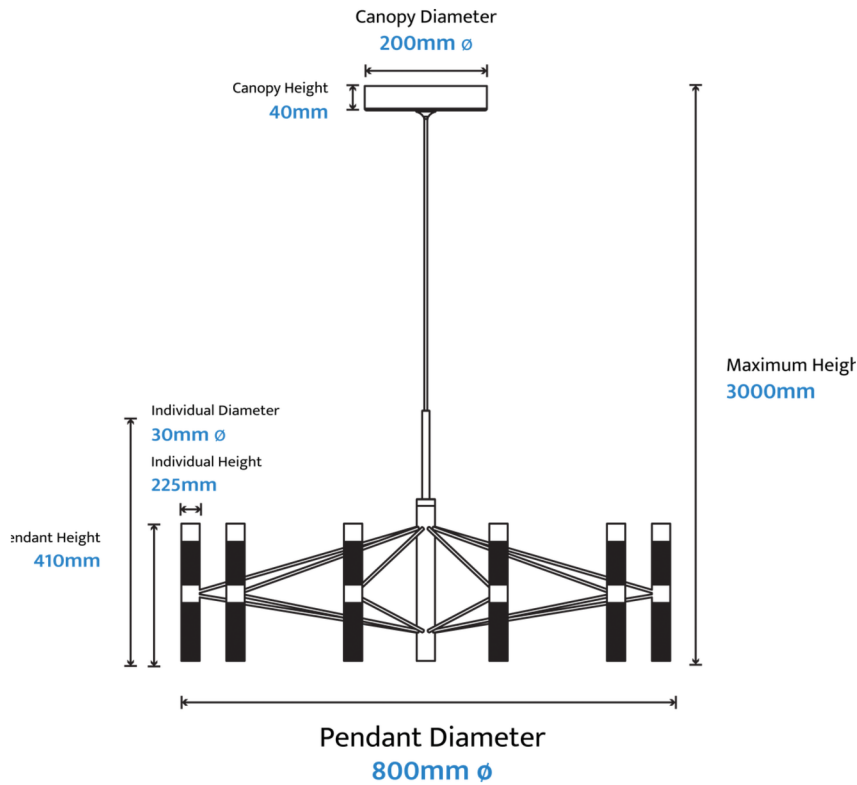

Aeris AER-10PN-80-80W Specifications

Light Source	LED SMD2835+COB
Colours	Black, Gold, White
Wattage	80W
Dimmable	No
Kelvins	3000K - 4000K - 6000K
Lumens	4787lm - 5090lm - 5468lm
CRI	CRI≥90
LED Hour Rating	66000H L70B50
Beam Angle	120° 24°

Supply (Voltage)	220-240V AC~50/60Hz
Temperature Rating	-20°C~+40°C
Construction	Aluminium & Silicone
IP Rating	IP20
Electrical Protection	Class II
Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
NZ/AU Driver Driver Type	L5-40-1050 LI EXC S Constant C, Isolated
Net Weight Gross Weight	3.5KG 8KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations

[VIEW RANGE PAGE](#)