

Allure ALU-1PN-19W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Gold	Temperature Rating	-20°C +25°C
Wattage	19W	Construction	Iron & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	2090lm - 2300lm - 2185lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H	NZ/AU Driver Driver Type	S019W22 Constant C, Non Isolated
		Net Weight Gross Weight	1.81KG 2.41KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



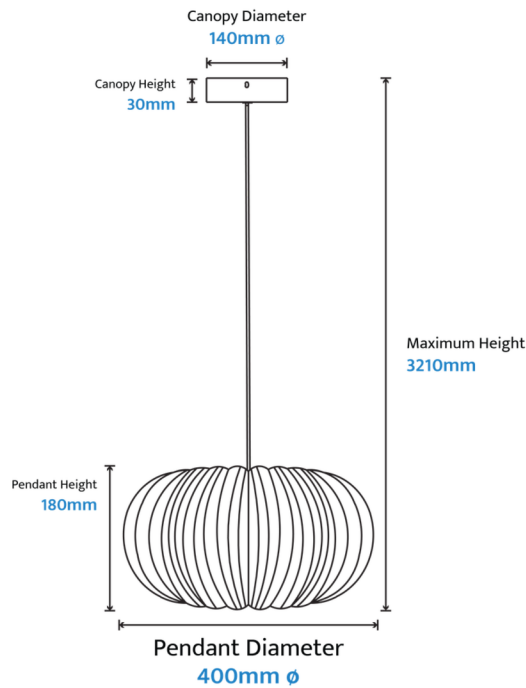

Allure ALU-1PN-31W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Gold	Temperature Rating	-20°C +25°C
Wattage	31W	Construction	Iron & Acrylic
Dimmable	Yes	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	3255lm - 3600lm - 3410lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI \geq 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H	NZ/AU Driver Driver Type	S031W26 Constant C, Non Isolated
		Net Weight Gross Weight	3.16KG 3.75KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



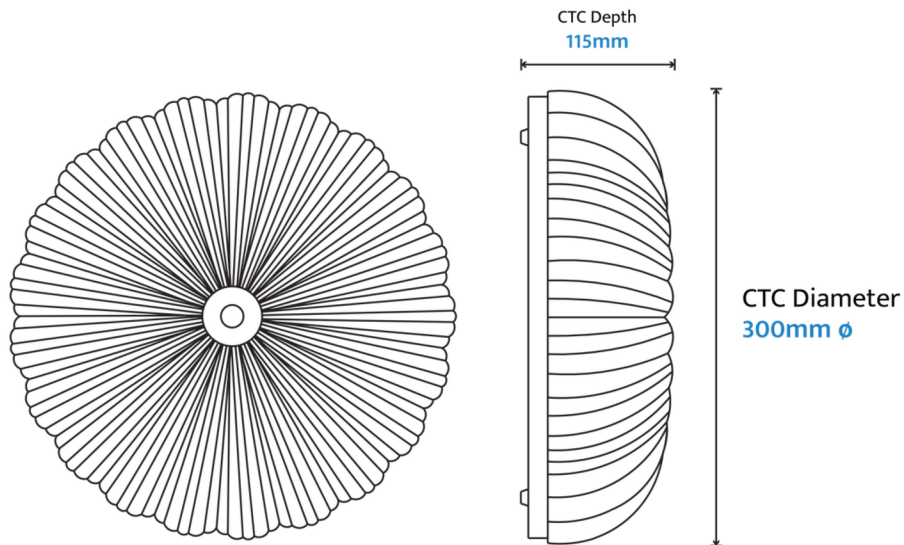

Allure ALU-30CT-19W Specifications

Light Source	LED SMD3030	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Gold	Temperature Rating	-20°C +25°C
Wattage	19W	Construction	Iron & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	1805lm - 2000lm - 1900lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H	NZ/AU Driver Driver Type	S019W22 Constant C, Non Isolated
		Net Weight Gross Weight	1.08KG 1.84KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



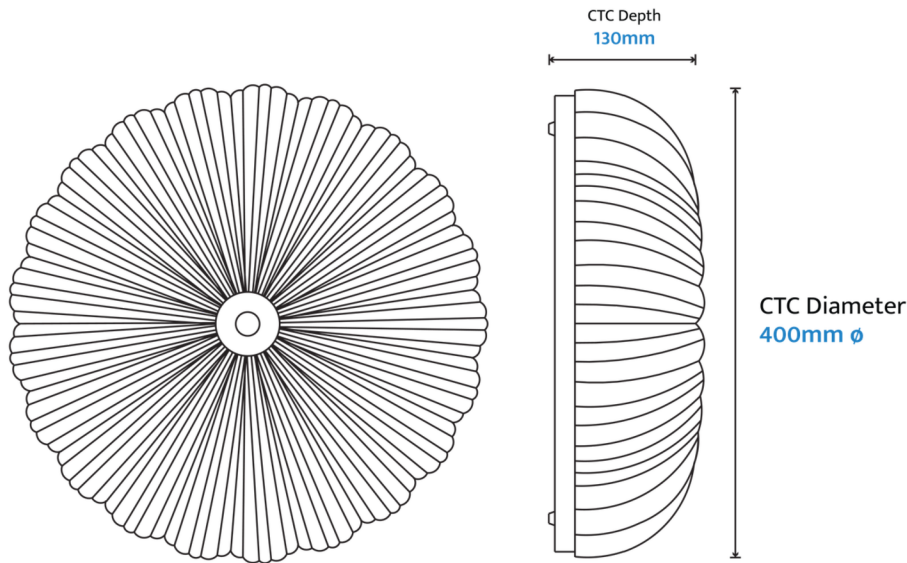

Allure ALU-40CT-31W Specifications

Light Source	LED SMD3030	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Gold	Temperature Rating	-20°C +25°C
Wattage	31W	Construction	Iron & Acrylic
Dimmable	Yes	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	3100lm - 3400lm - 3255lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H	NZ/AU Driver Driver Type	S031W26 Constant C, Non Isolated
		Net Weight Gross Weight	2.26KG 2.86KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



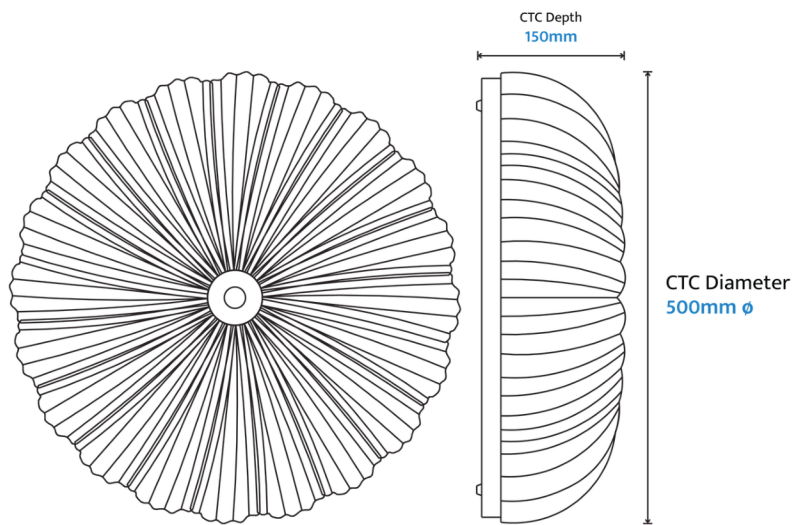

Allure ALU-50CT-48W Specifications

Light Source	LED SMD3030	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Gold	Temperature Rating	-20°C +25°C
Wattage	48W	Construction	Iron & Acrylic
Dimmable	Yes	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	5040lm - 5500lm - 5280lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H	NZ/AU Driver Driver Type	S048W42 Constant C, Non Isolated
		Net Weight Gross Weight	3.79KG 4.76KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

