


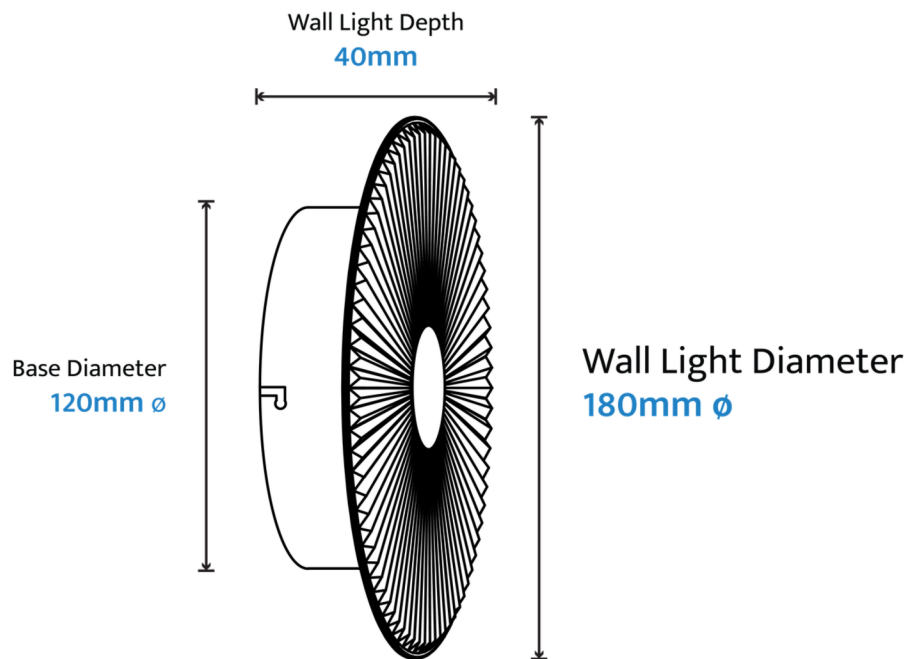

Bilby BIL-15WL-5W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Brass, Chrome	Temperature Rating	-20°C +50°C
Wattage	5W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	320lm - 400lm - 360lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLR009YS Constant C, Yes
		Net Weight Gross Weight	1KG 0.5KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



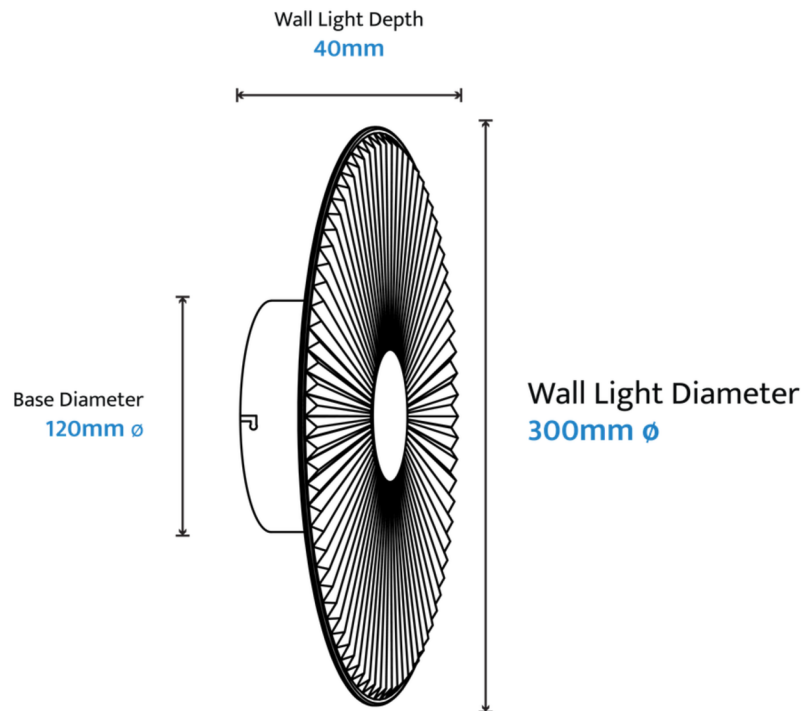

Bilby BIL-30WL-5W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Brass, Chrome	Temperature Rating	-20°C +50°C
Wattage	5W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	320lm - 400lm - 360lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLR009YS Constant C, Yes
		Net Weight Gross Weight	1.5KG 0.9KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

