


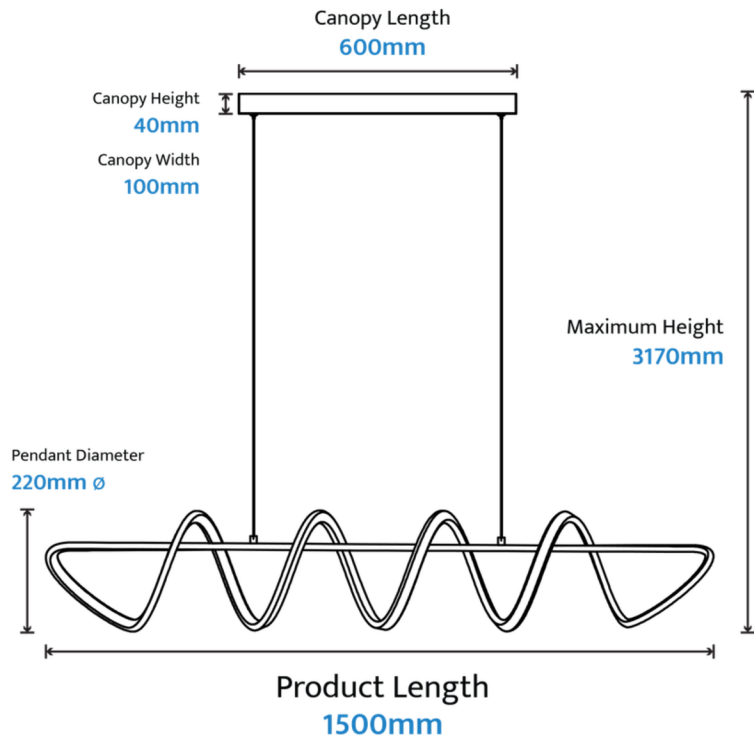

Bulbul BUL-150PN-80W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	80W	Construction	Aluminium & Silicon
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	2600lm - 3200lm - 2900lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLF040YS Constant C, Yes
		Net Weight Gross Weight	3.74KG 5.95KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



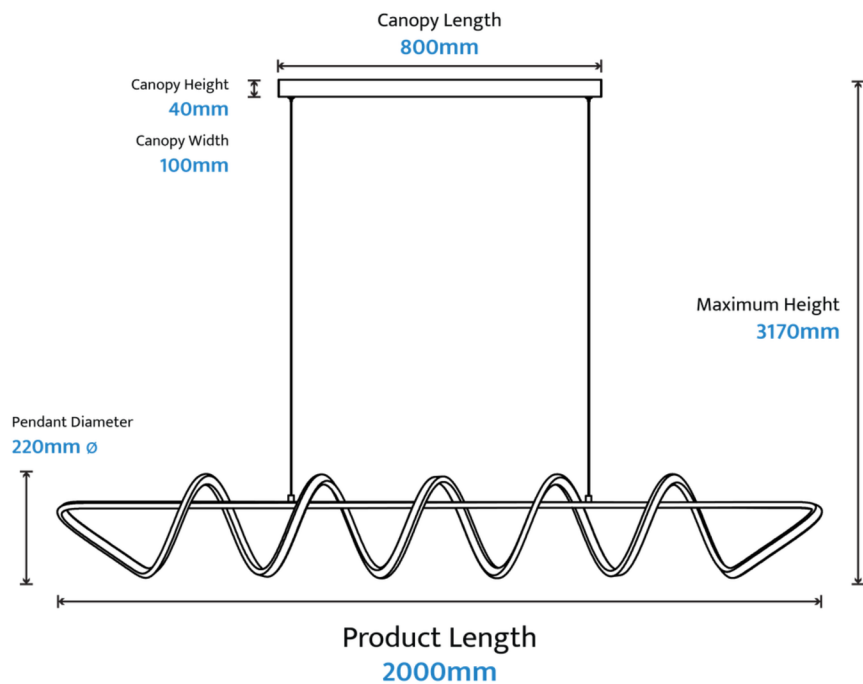

Bulbul BUL-200PN-110W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	110W	Construction	Aluminium & Silicon
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	3600lm - 4400lm - 4000lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLF060YS Constant C, Yes
		Net Weight Gross Weight	4.32KG 7.08KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

