


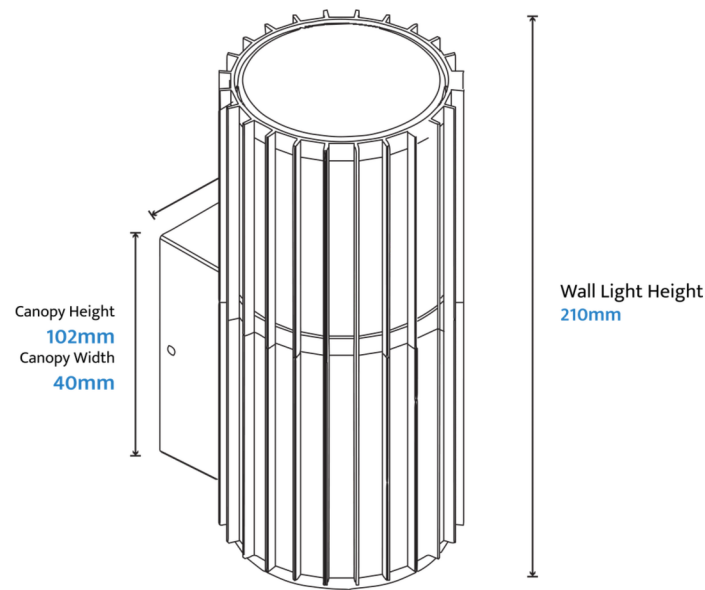

Bright BRI-1EX-5W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Rust, White	Temperature Rating	-20°C~+40°C
Wattage	5W	Construction	Aluminium & Polycarbonate
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	303lm - 344lm - 331lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H L70B50	NZ/AU Driver Driver Type	LS-6-150 SB Constant C, Isolated
Beam Angle	265°	Net Weight Gross Weight	0.68KG 0.77KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



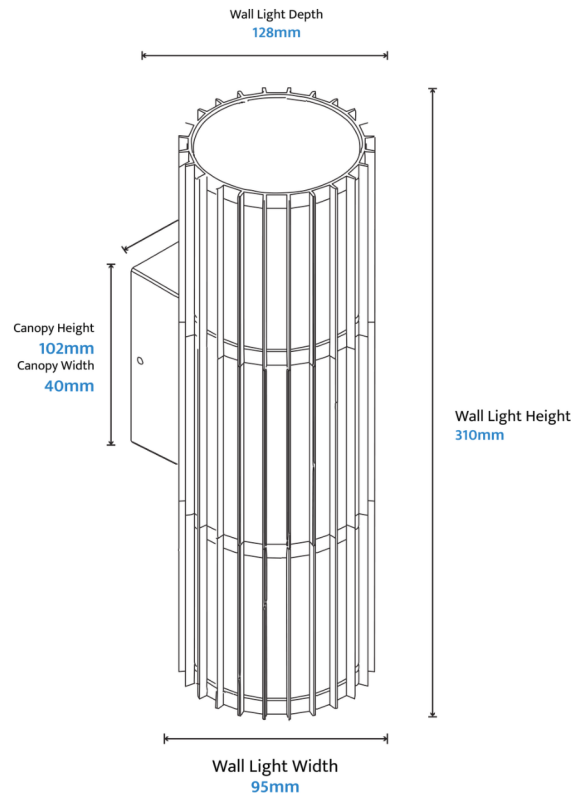

Bright BRI-2EX-10W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Rust, White	Temperature Rating	-20°C~+40°C
Wattage	10W	Construction	Aluminium & Polycarbonate
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	499lm - 555lm - 533lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H L70B50	NZ/AU Driver Driver Type	CS-15-250 SI Constant C, Isolated
Beam Angle	265°	Net Weight Gross Weight	0.66KG 0.95KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

