


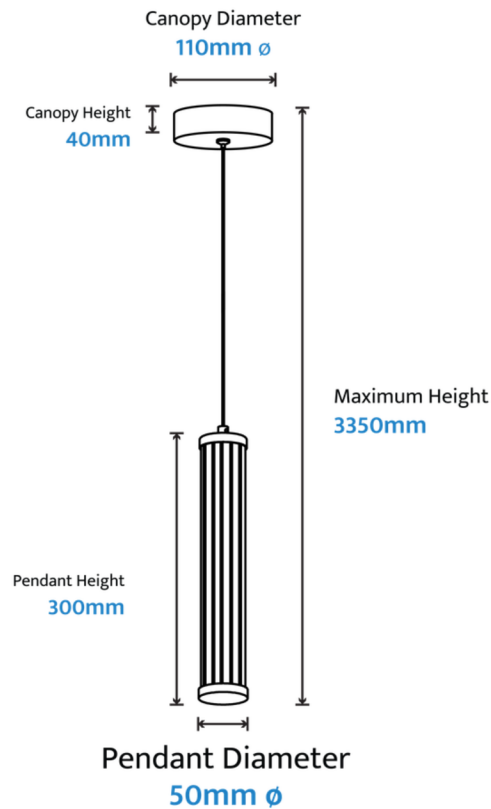

Charm CHA-1PN-10W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	10W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	800lm - 900lm - 850lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLR013YS Constant C, Yes
		Net Weight Gross Weight	0.77KG 1.32KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



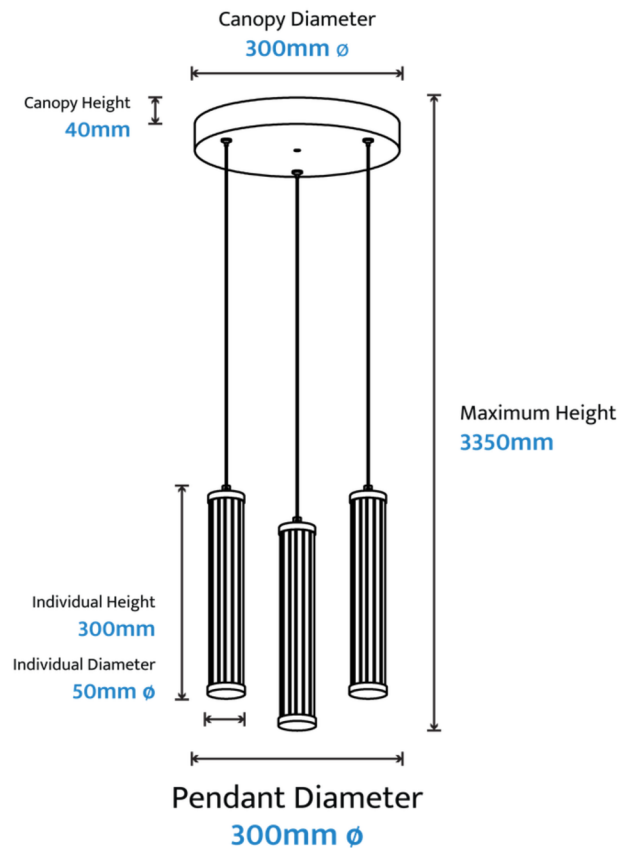

Charm CHA-3PN-30W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	3x10W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	2400lm - 2700lm - 2550lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI $\geq$ 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLF030YS Constant C, Yes
		Net Weight Gross Weight	2.57KG 3.18KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



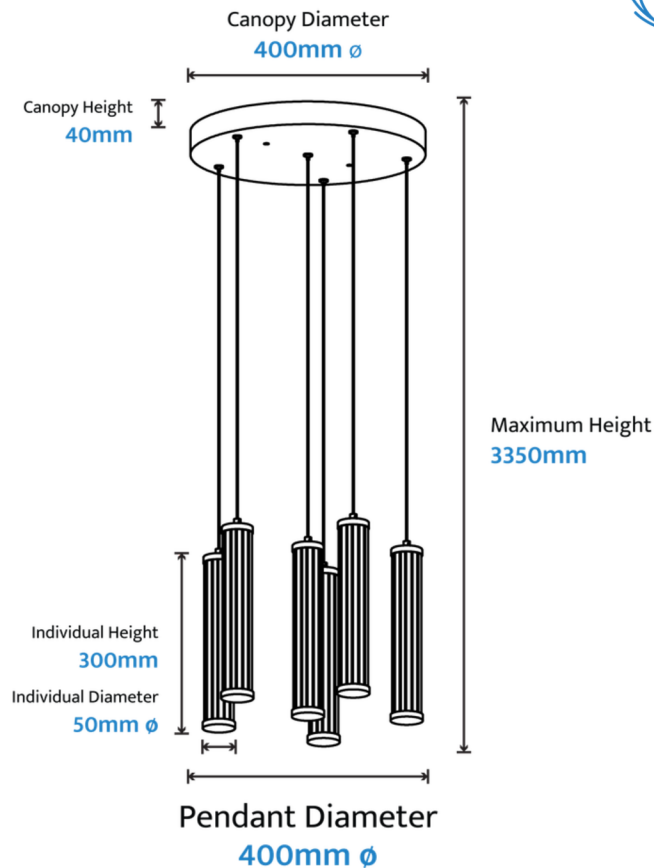

Charm CHA-6PN-60W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	6x10W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	4800lm - 5400lm - 5100lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLF060YS Constant C, Yes
		Net Weight Gross Weight	4.8KG 1.44KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



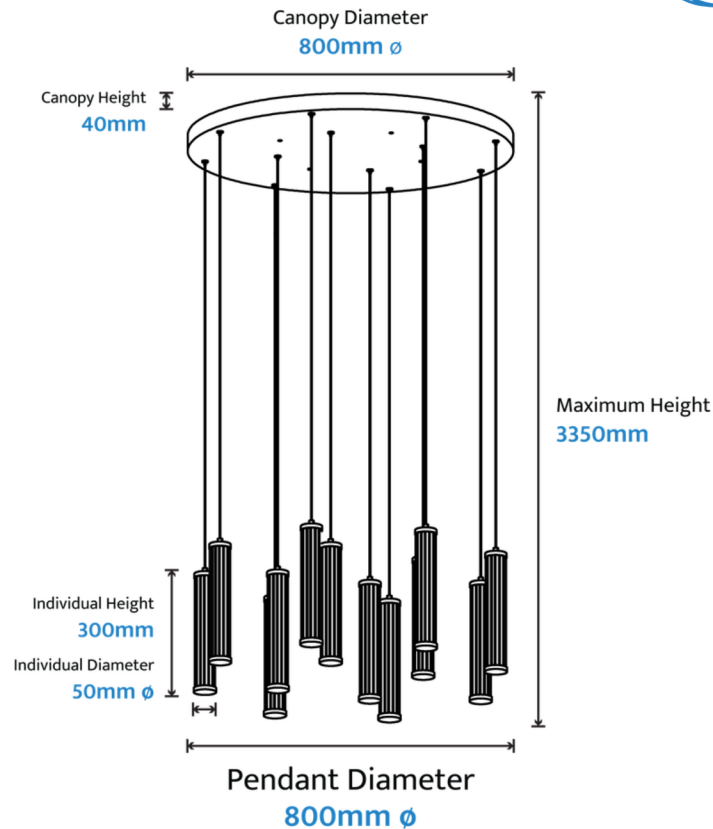

Charm CHA-12PN-120W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	12x10W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	9600lm - 10800lm - 10200lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLF060YS Constant C, Yes
		Net Weight Gross Weight	1.15KG 5.13KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



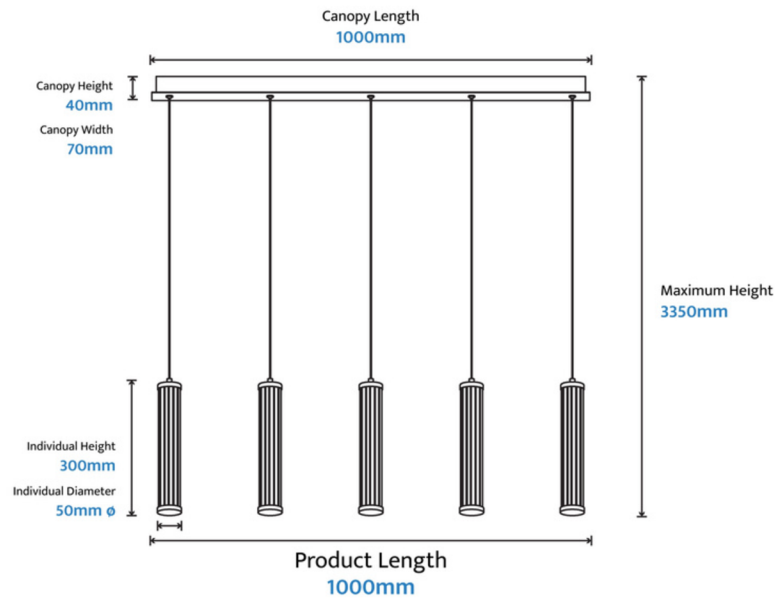

Charm CHA-5PN-50W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	5x10W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	4000lm - 4500lm - 4250lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	LF-GLF050YS Constant C, Yes
		Net Weight Gross Weight	4.2KG 5.8KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



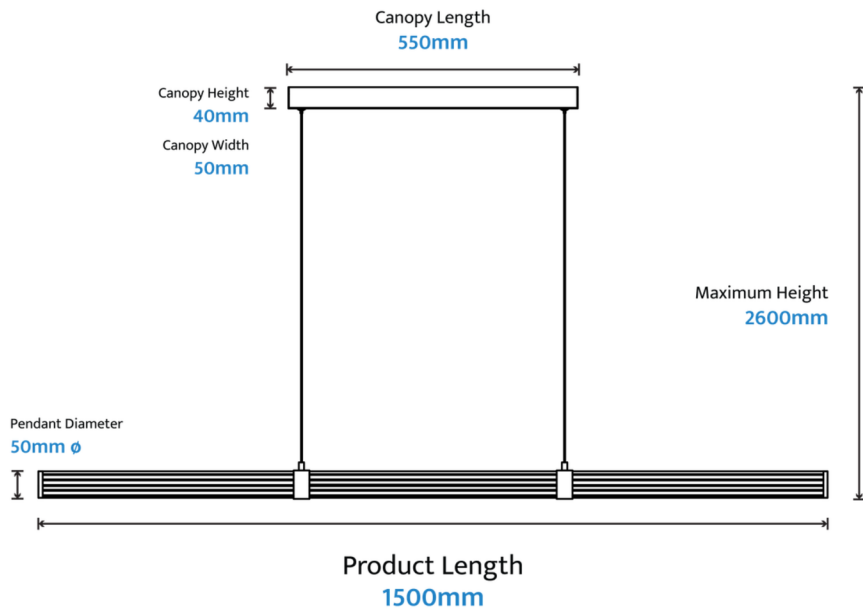

Charm CHA-150LN-45W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	45W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	3600lm - 4050lm - 3820lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI $\geq$ 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	JW-70-420-1200 Constant C, Yes
		Net Weight Gross Weight	2.95KG 4.14KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



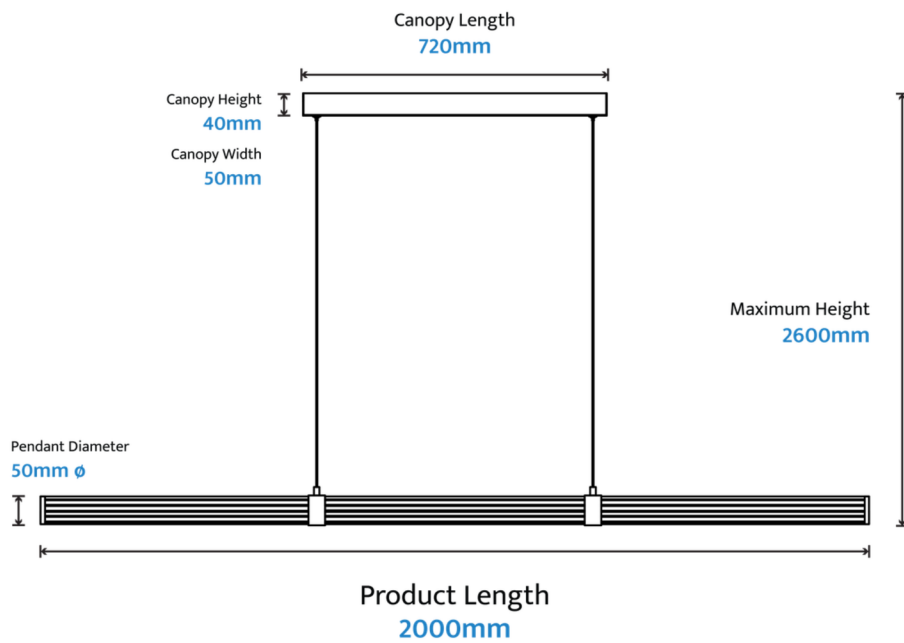

Charm CHA-200LN-60W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	60W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	4800lm - 5400lm - 5100lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI $\geq$ 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	JW-70-400-1500 Constant C, Yes
		Net Weight Gross Weight	4.09KG 5.42KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



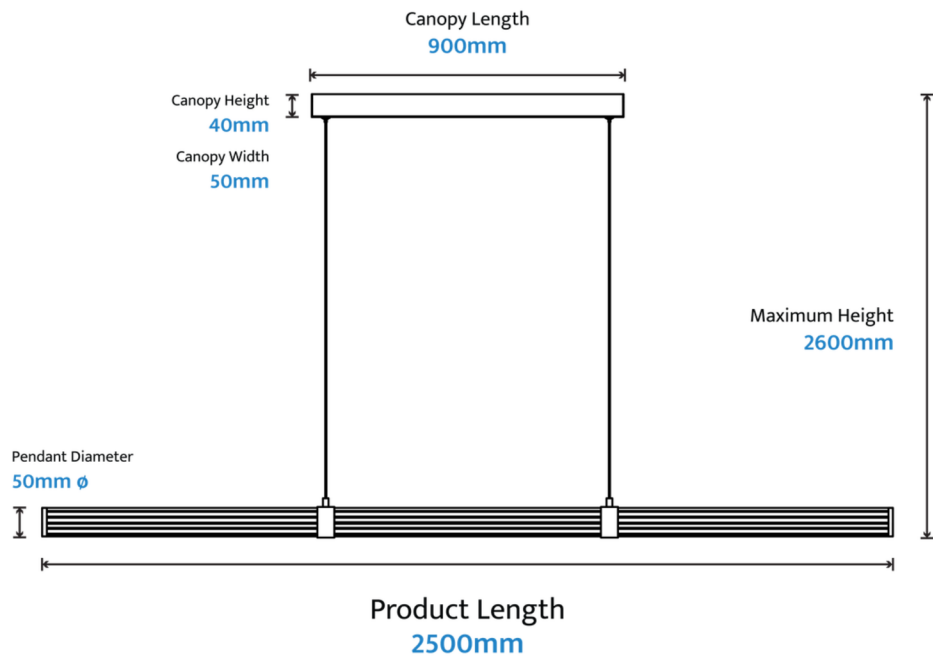

Charm CHA-250LN-75W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass	Temperature Rating	-20°C +50°C
Wattage	75W	Construction	Aluminium & Acrylic
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6500K	Electrical Protection	Class II
Lumens	6000lm - 6750lm - 6370lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI $\geq$ 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H	NZ/AU Driver Driver Type	JW-71-450-1800 Constant C, Yes
		Net Weight Gross Weight	5.11KG 6.62KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

