


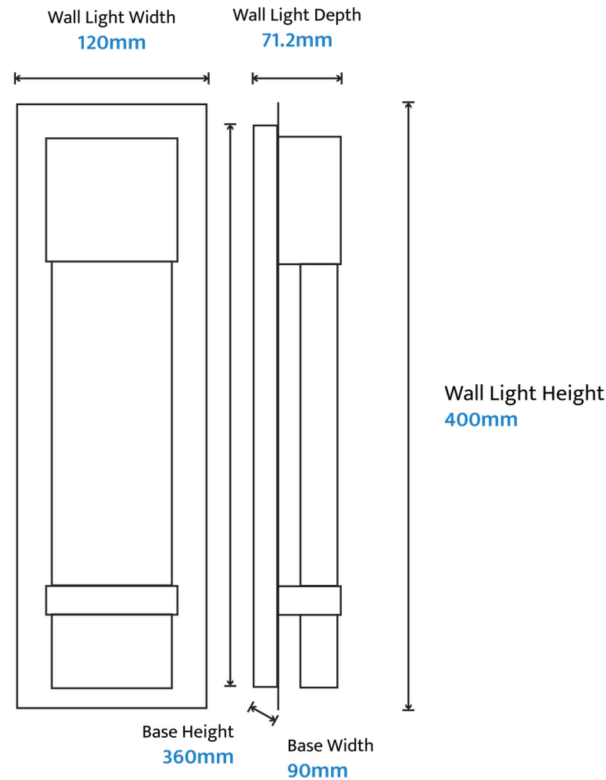

Coot COT-1EX-30 Specifications

Light Source	LED SMD3030	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, White	Temperature Rating	-20°C +45°C
Wattage	12W	Construction	Seeded Glass & Aluminium
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	950lm - 1050lm - 1000lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	50000H 6V	NZ/AU Driver Driver Type	DC30-40V Constant C, Isolated
Beam Angle	90°	Net Weight Gross Weight	1.64KG 1.69KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



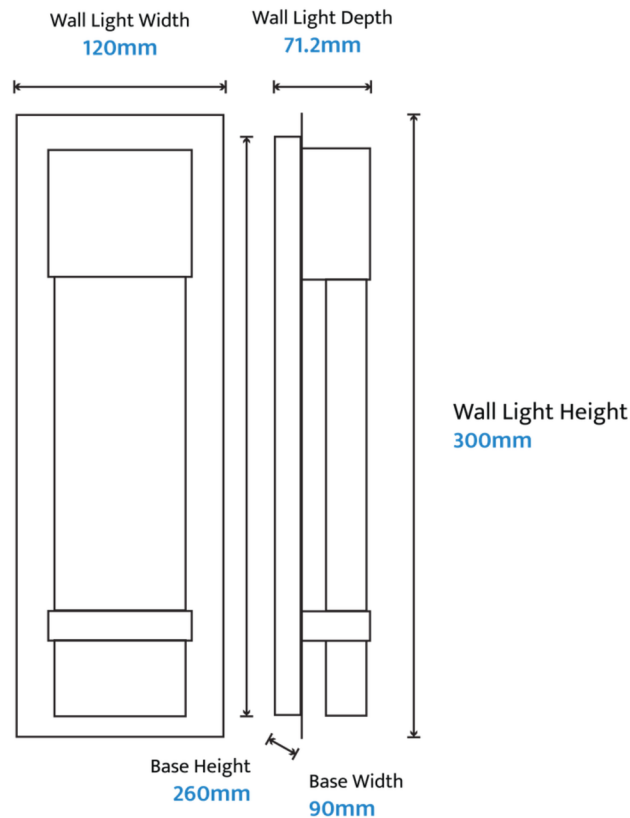

Coot COT-1EX-40 Specifications

Light Source	LED SMD3030	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, White	Temperature Rating	-20°C +45°C
Wattage	12W	Construction	Seeded Glass & Aluminium
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	950lm - 1050lm - 1000lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	50000H 6V	NZ/AU Driver Driver Type	DC30-40V Constant C, Isolated
Beam Angle	90°	Net Weight Gross Weight	2.12KG 2.23KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



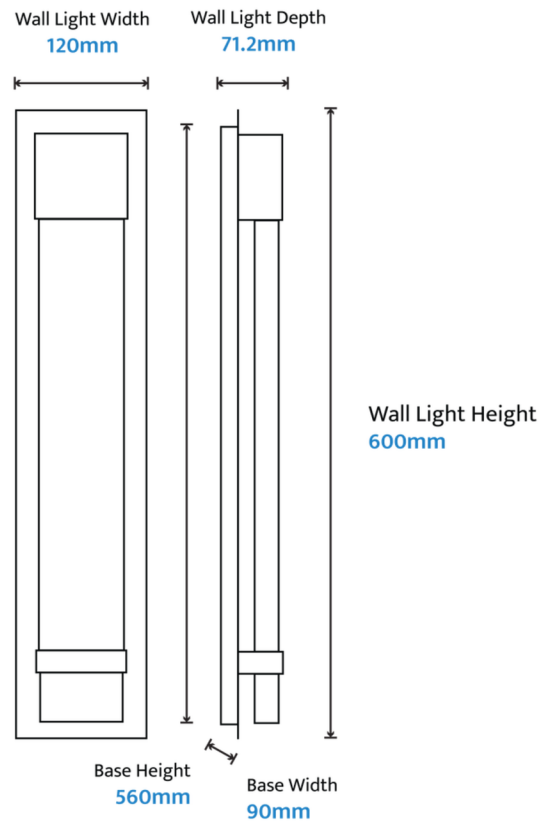

Coot COT-1EX-60 Specifications

Light Source	LED SMD3030	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, White	Temperature Rating	-20°C +25°C
Wattage	12W	Construction	Seeded Glass & Aluminium
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class I
Lumens	950lm - 1050lm - 1000lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	50000h L80	NZ/AU Driver Driver Type	KJUP121C 12Watt DC30-40V 320mA Constant C, Isolated
Beam Angle	90°	Net Weight Gross Weight	3.06KG 3.3KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

