


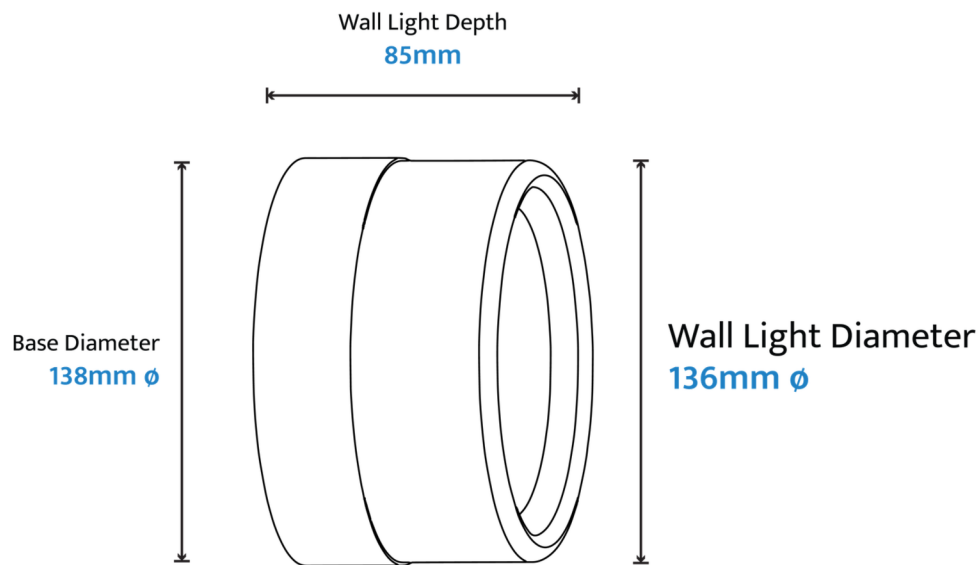

Gull GUL-14WL-5W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass, White	Temperature Rating	-20°C +25°C
Wattage	5W	Construction	Acrylic & Aluminium
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	380lm - 450lm - 400lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000h L80	NZ/AU Driver Driver Type	LS-6-150 SB Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	0.79KG 1KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



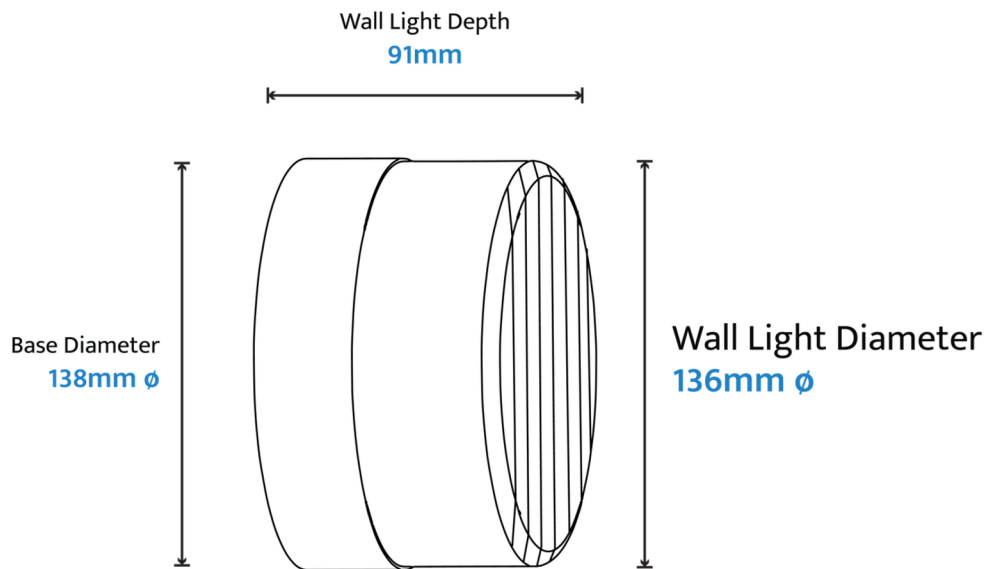

Gull GUL-14WL-5W-RB Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brass, White	Temperature Rating	-20°C +25°C
Wattage	5W	Construction	Acrylic & Aluminium
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	380lm - 450lm - 400lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000h L80	NZ/AU Driver Driver Type	LS-6-150 SB Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	0.81KG 1.02KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

