

Kinglet KIN-45CL-36W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C+40°C
Wattage	36W	Construction	Aluminium & Acrylic
Dimmable	Yes	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	2377lm - 2485lm - 2593lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	LS-40-1050 TRIAC LI Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	4.25KG 5.25KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



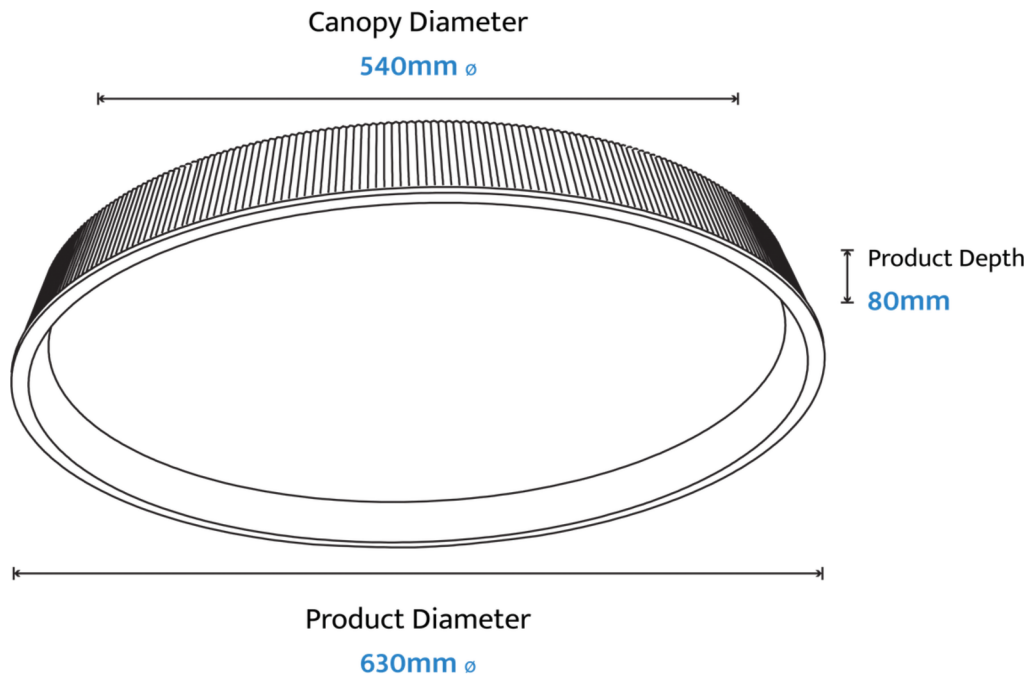

Kinglet KIN-63CL-75W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Gold, White	Temperature Rating	-20°C+40°C
Wattage	75W	Construction	Aluminium & Acrylic
Dimmable	Yes	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	4584lm - 5129lm - 5325lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	66000H L70B50	NZ/AU Driver Driver Type	LS-40-1050 TRIAC LI *2 Constant C, Isolated
Beam Angle	120°	Net Weight Gross Weight	5.5KG 9.8KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

