


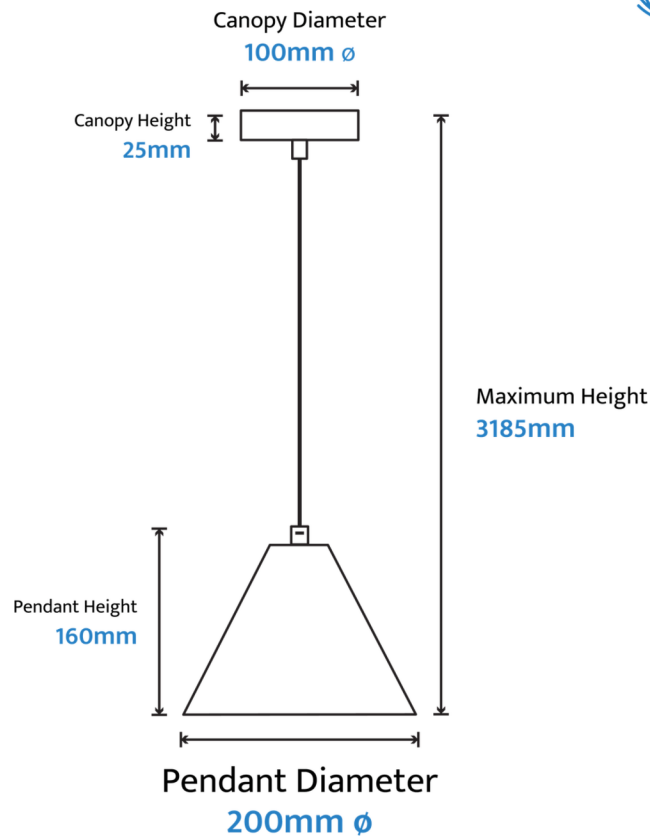

Orville ORV-1PN-20-E27 Specifications

Light Source	1 x E27 Bulbs not included	Construction	Travertine & Metal
Colours	Travertine with Brass	IP Rating	IP20
Wattage	60W	Electrical Protection	Class I
Dimmable	Compatible with dimmable globes	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1
Supply (Voltage)	220-240V AC~50/60Hz	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
Temperature Rating	-20°C+40°C	Net Weight Gross Weight	2.1KG 2.4KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



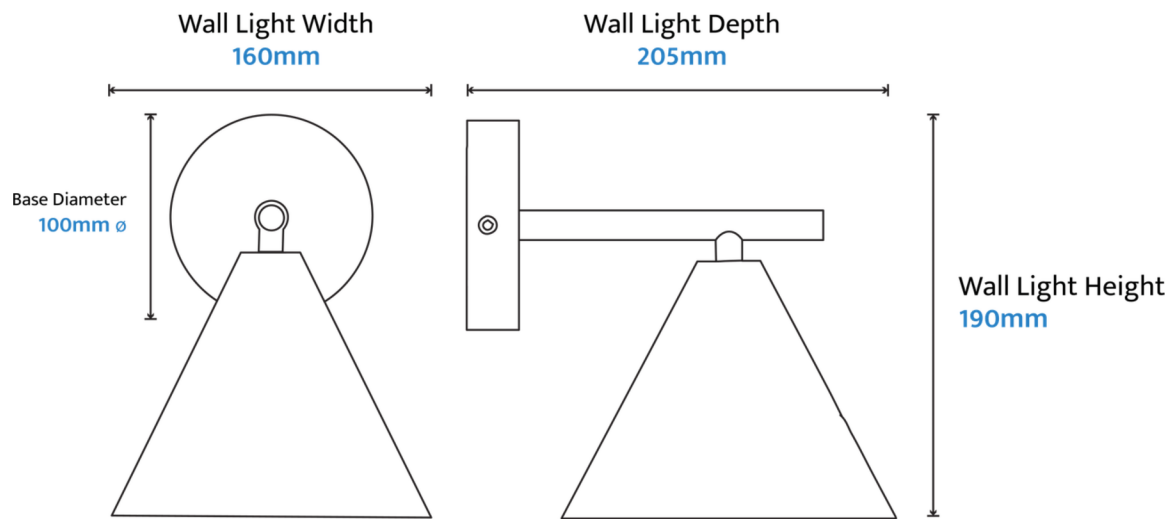

Orville ORV-1WL-20-E27 Specifications

Light Source	1 x E27 Bulbs not included	Construction	Travertine & Metal
Colours	Travertine with Brass	IP Rating	IP20
Wattage	60W	Electrical Protection	Class I
Dimmable	Compatible with dimmable globes	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1
Supply (Voltage)	220-240V AC~50/60Hz	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
Temperature Rating	-20°C~+40°C	Net Weight Gross Weight	1.1KG 1.6KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



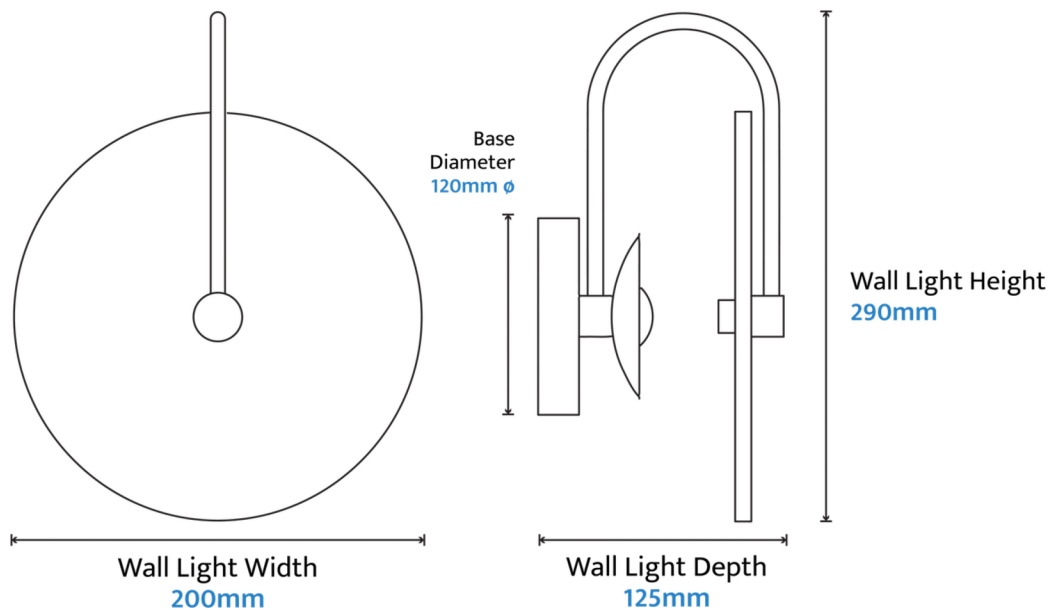

Orville ORV-20WLH-5W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Brass	Temperature Rating	-20°C~+40°C
Wattage	5.2W	Construction	Travertine & Metal
Dimmable	No	IP Rating	IP20
Kelvins	3000K	Electrical Protection	Class II
Lumens	169lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H L90B10	NZ/AU Driver Driver Type	LS-6-250 SI E Constant C, Isolated
Beam Angle	180°	Net Weight Gross Weight	1.3KG 1.7KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



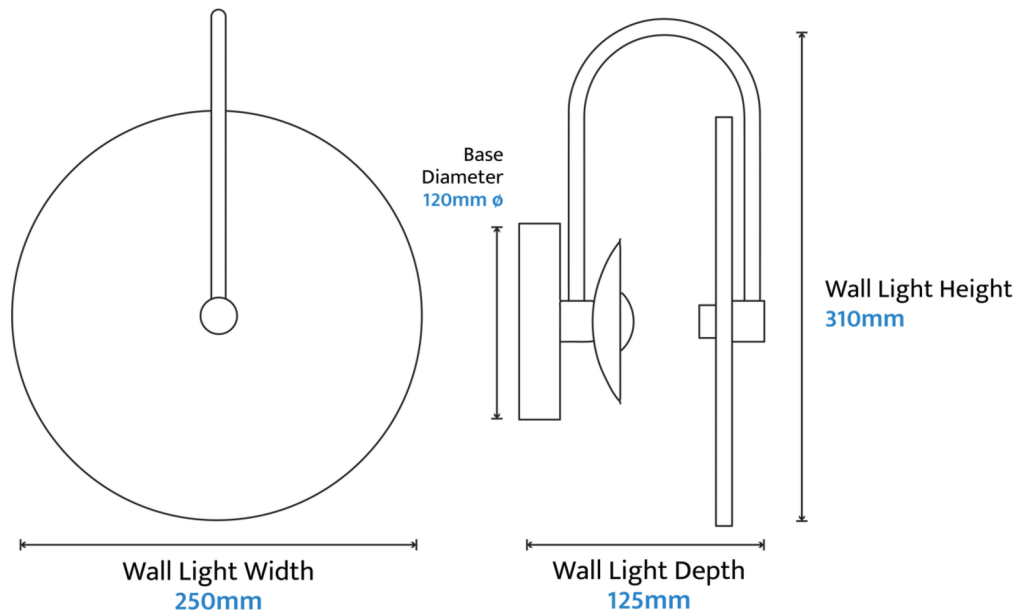

Orville ORV-25WLH-5W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Brass	Temperature Rating	-20°C~+40°C
Wattage	5.2W	Construction	Travertine & Metal
Dimmable	No	IP Rating	IP20
Kelvins	3000K	Electrical Protection	Class II
Lumens	169lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H L90B10	NZ/AU Driver Driver Type	LS-6-250 SI E Constant C, Isolated
Beam Angle	180°	Net Weight Gross Weight	1.5KG 1.8KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



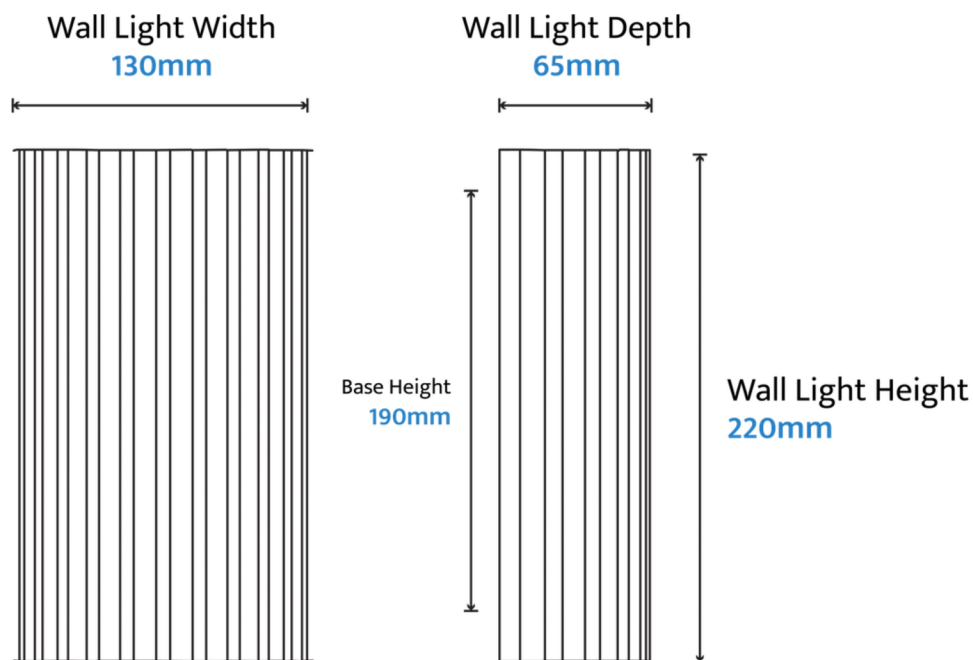

Orville ORV-22WLL-5W Specifications

Light Source	LED COB	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with White	Temperature Rating	-20°C~+40°C
Wattage	2*2.5W	Construction	Travertine & Metal
Dimmable	No	IP Rating	IP20
Kelvins	3000K	Electrical Protection	Class II
Lumens	242lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H L90B10	NZ/AU Driver Driver Type	LS-3-500 SB Constant C, Isolated
Beam Angle	90°	Net Weight Gross Weight	1.1KG 1.7KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



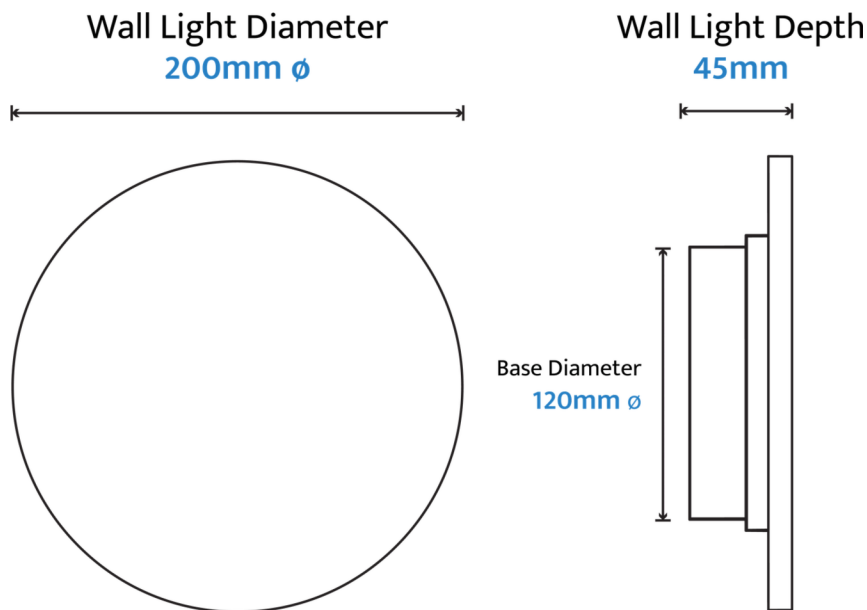

Orville ORV-20WLR-6W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Black	Temperature Rating	-20°C~+40°C
Wattage	6W	Construction	Travertine & Metal
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	399lm - 428lm - 404lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H L90B10	NZ/AU Driver Driver Type	LS-8-200 CCT SI E Constant C, Isolated
Beam Angle	180°	Net Weight Gross Weight	1KG 1.3KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



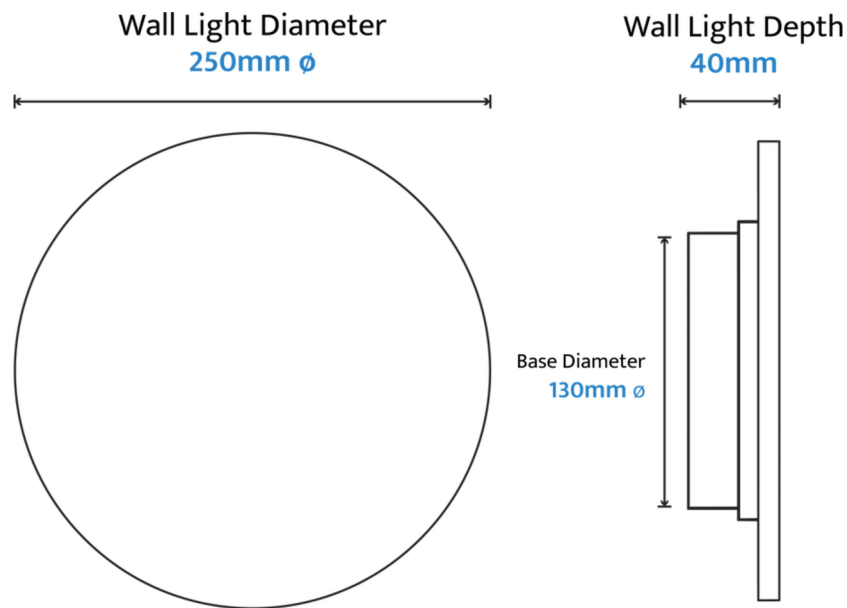

Orville ORV-25WLR-6W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Black	Temperature Rating	-20°C~+40°C
Wattage	6W	Construction	Travertine & Metal
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	399lm - 428lm - 404lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H L90B10	NZ/AU Driver Driver Type	LS-8-200 CCT SI E Constant C, Isolated
Beam Angle	180°	Net Weight Gross Weight	1.9KG 2.3KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



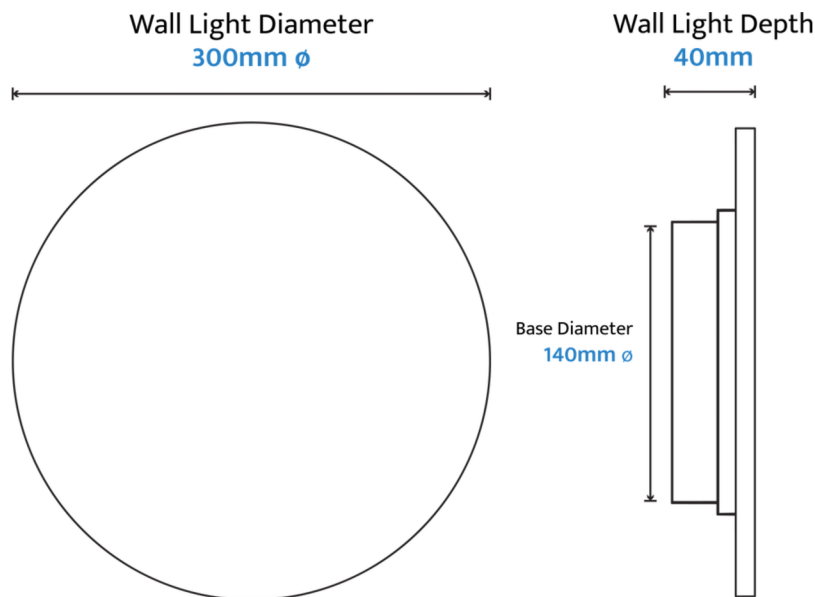

Orville ORV-30WLR-6W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Black	Temperature Rating	-20°C~+40°C
Wattage	6W	Construction	Travertine & Metal
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	399lm - 428lm - 404lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI $\geq$ 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	20000H L90B10	NZ/AU Driver Driver Type	LS-8-200 CCT SI E Constant C, Isolated
Beam Angle	180°	Net Weight Gross Weight	2.3KG 2.8KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



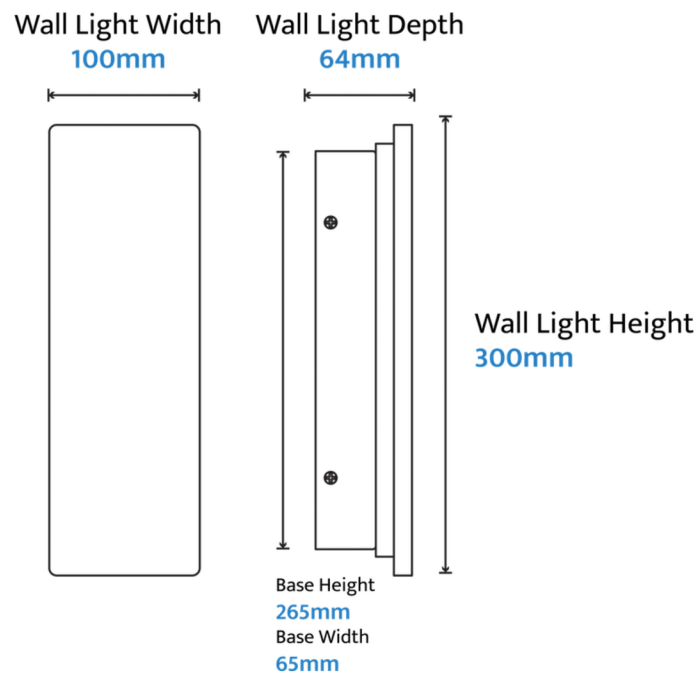

Orville ORV-30WLS-7W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Black	Temperature Rating	-20°C~+45°C
Wattage	7W	Construction	Travertine & Silicon
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	386.7lm - 398.1lm - 382.2lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H L80B50	NZ/AU Driver Driver Type	LS-8-200 CCT SI E Constant C, Isolated
Beam Angle	360°	Net Weight Gross Weight	2.1KG 2.6KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



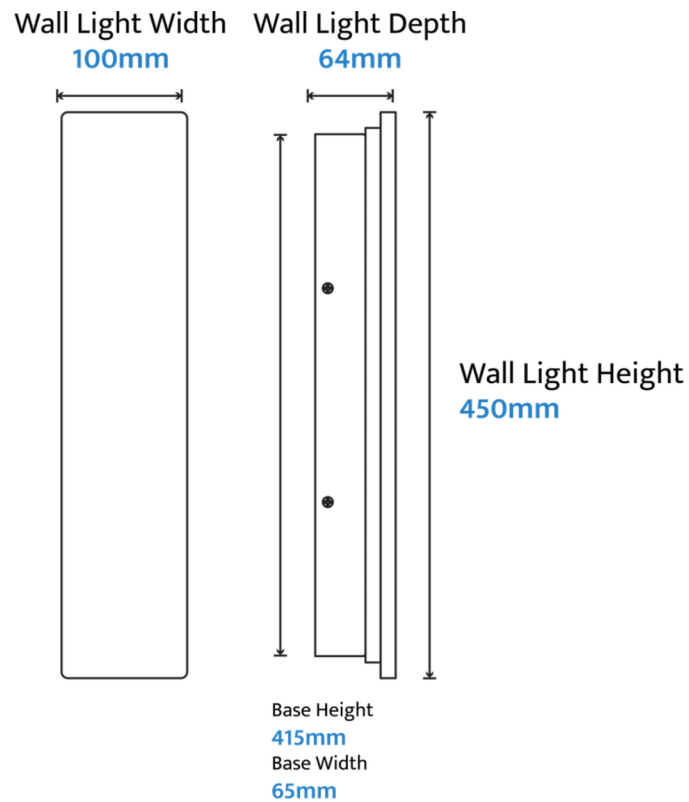

Orville ORV-45WLS-12W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Black	Temperature Rating	-20°C~+45°C
Wattage	12W	Construction	Travertine & Silicon
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	498.9lm - 542.9lm - 529.8lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H L80B50	NZ/AU Driver Driver Type	LS-12-300 CCT SI E Constant C, Isolated
Beam Angle	360°	Net Weight Gross Weight	2.16KG 2.44KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



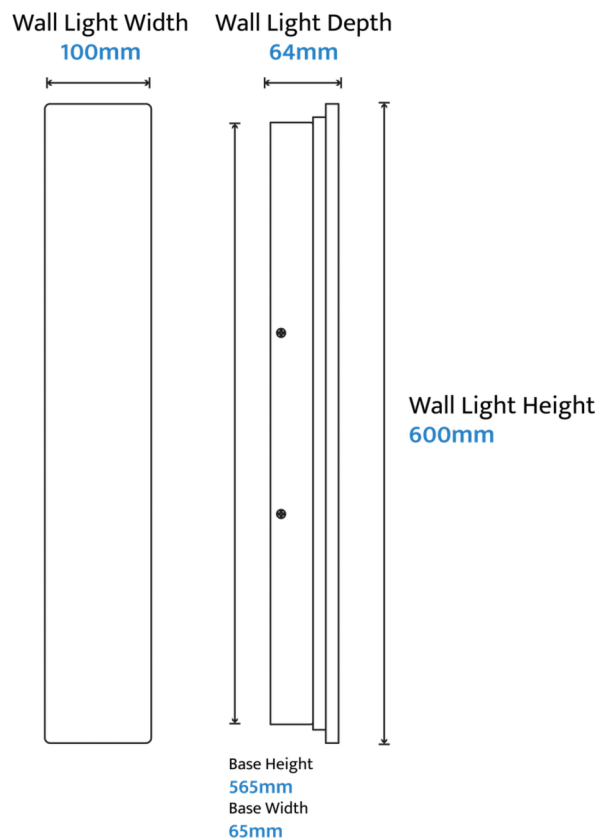

Orville ORV-60WLS-16W Specifications

Light Source	LED SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Travertine with Black	Temperature Rating	-20°C~+45°C
Wattage	16W	Construction	Travertine & Silicon
Dimmable	No	IP Rating	IP65
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	651lm - 685lm - 667.4lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000H L80B50	NZ/AU Driver Driver Type	LS-21-400 CCT SI E Constant C, Isolated
Beam Angle	360°	Net Weight Gross Weight	2.82KG 4.1KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

