


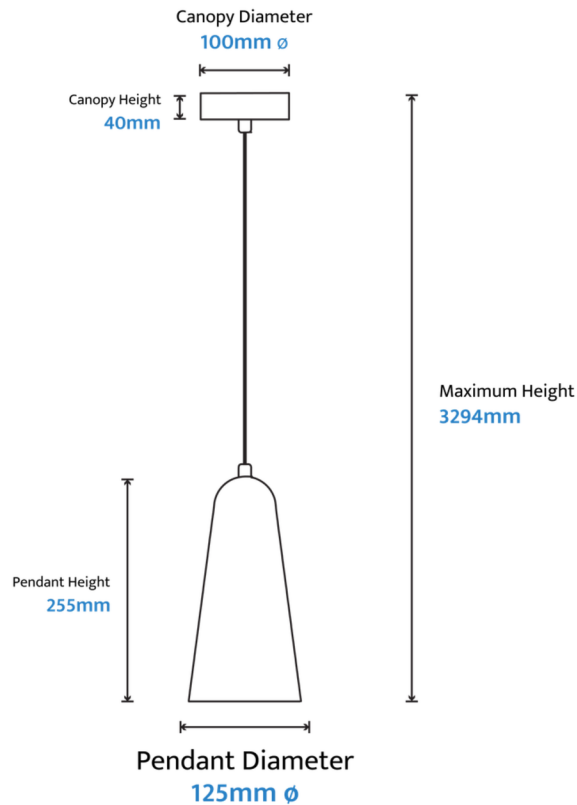

Skua SKU-1PN-5W Specifications

Light Source	LED COB	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brushed Brass, Brushed Nickel	Temperature Rating	-20°C +25°C
Wattage	5W	Construction	Glass & Aluminium
Dimmable	No	IP Rating	IP20
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	280lm - 340lm - 360lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI $\geq$ 80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000 hrs L80	NZ/AU Driver Driver Type	XFL005C0130SLAT Constant C, Isolated
Beam Angle	75°	Net Weight Gross Weight	1KG 1.8KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



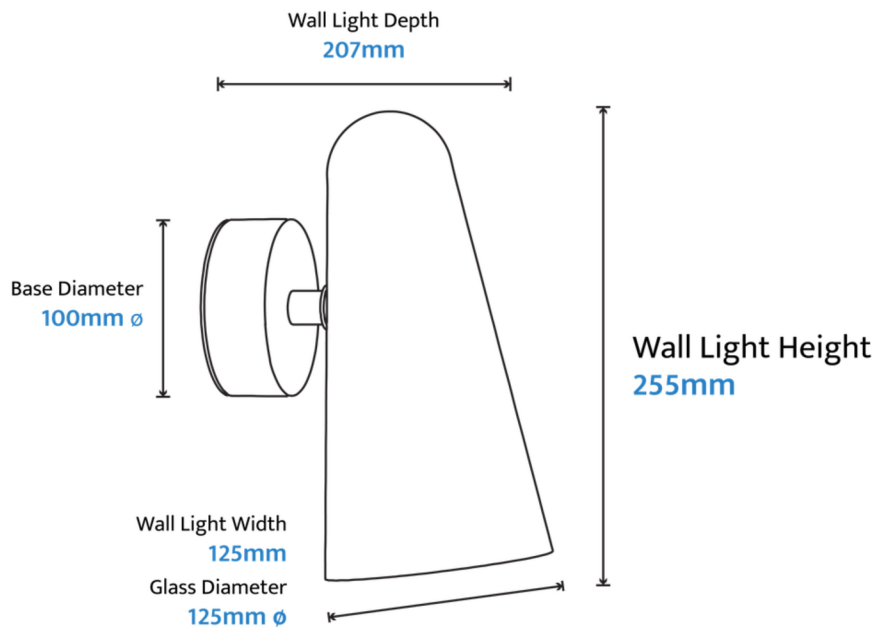

Skua SKU-26WL-5W Specifications

Light Source	LED COB	Supply (Voltage)	220-240V AC~50/60Hz
Colours	Black, Brushed Brass, Brushed Nickel	Temperature Rating	-20°C +25°C
Wattage	5W	Construction	Glass & Aluminium
Dimmable	No	IP Rating	IP44
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	280lm - 340lm - 360lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS CISPR 15
CRI	CRI≥80	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
LED Hour Rating	30000 hrs L80	NZ/AU Driver Driver Type	XFL005C0130SLAT Constant C, Isolated
Beam Angle	75°	Net Weight Gross Weight	0.95KG 1.6KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

