

Robin ROB-28CL-18W Specifications

Light Source	LED SMT	Construction	Polycarbonate
Colours	White	IP Rating	IP54
Wattage	18W	Electrical Protection	Class II
Dimmable	Yes - Trailing Edge	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
Kelvins	3000K - 4000K - 5000K	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
Lumens	1150lm - 1250lm - 1250lm	NZ/AU Driver Driver Type	Constant C, Non Isolated, Test With Appliance
CRI	CRI≥80	Net Weight Gross Weight	0.63KG 0.8KG
Supply (Voltage)	220-240V AC~50/60Hz		
Temperature Rating	-20°C +25°C		


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



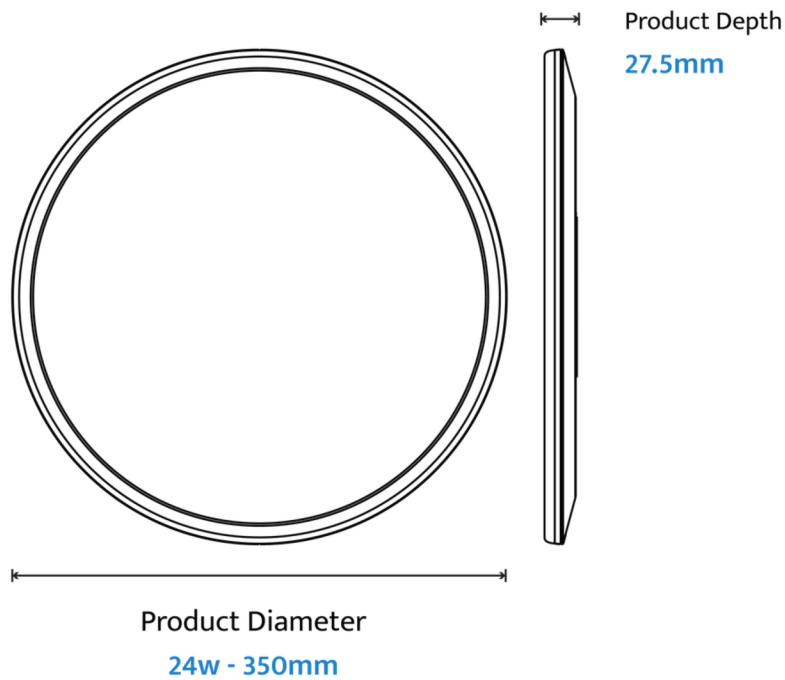

Robin ROB-35CL-24W Specifications

Light Source	LED SMT	Construction	Polycarbonate
Colours	White	IP Rating	IP54
Wattage	24W	Electrical Protection	Class II
Dimmable	Yes - Trailing Edge	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
Kelvins	3000K - 4000K - 5000K	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
Lumens	1500lm - 1600lm - 1600lm	NZ/AU Driver Driver Type	Constant C, Non Isolated, Test With Appliance
CRI	CRI≥80	Net Weight Gross Weight	0.88KG 1.23KG
Supply (Voltage)	220-240V AC~50/60Hz		
Temperature Rating	-20°C +25°C		


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)



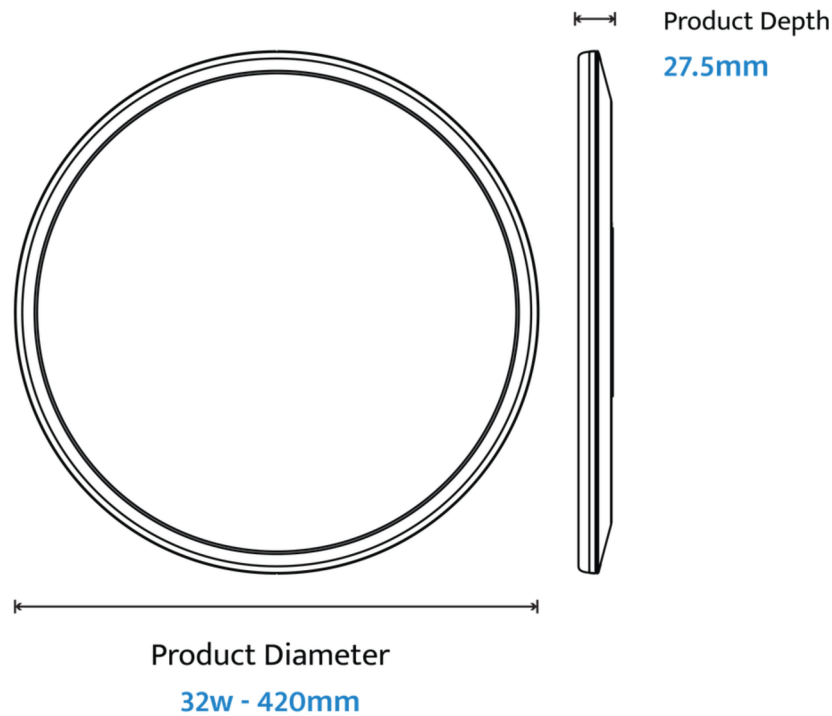

Robin ROB-42CL-32W Specifications

Light Source	LED SMT	Construction	Polycarbonate
Colours	White	IP Rating	IP54
Wattage	32W	Electrical Protection	Class II
Dimmable	Yes - Trailing Edge	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
Kelvins	3000K - 4000K - 5000K	Recommended Use Warranty	Domestic / Commercial 3 Year Replacement
Lumens	2000lm - 2100lm - 2100lm	NZ/AU Driver Driver Type	Constant C, Non Isolated, Test With Appliance
CRI	CRI≥80	Net Weight Gross Weight	1.38KG 1.73KG
Supply (Voltage)	220-240V AC~50/60Hz		
Temperature Rating	-20°C +25°C		

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations



[VIEW RANGE PAGE](#)

