

## Lory LOR-9DL-13W Specifications

<b>Light Source</b>	LED   SMD2835	<b>Supply (Voltage)</b>	220-240V AC~50/60Hz
<b>Colours</b>	White	<b>Temperature Rating</b>	-20°C +40°C
<b>Wattage</b>	13W	<b>Construction</b>	Aluminium & PMMA
<b>Dimmable</b>	Yes - Trailing Edge (5% - 100%)	<b>IP Rating</b>	IP44
<b>Kelvins</b>	3000K - 4000K - 6000K	<b>Electrical Protection</b>	Class II
<b>Lumens</b>	1100lm - 1200lm - 1150lm	<b>Compliance</b>	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
<b>CRI</b>	CRI≥83	<b>Recommended Use   Warranty</b>	Domestic / Commercial   5 Year Replacement
<b>LED Hour Rating</b>	50000H   3V	<b>NZ/AU Driver   Driver Type</b>	DC30-40V   Constant C, Isolated
<b>Beam Angle</b>	120°	<b>Net Weight   Gross Weight</b>	0.27KG   0.31KG


All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: [customerservice@calibo.com.au](mailto:customerservice@calibo.com.au)

Also available in other configurations



[VIEW RANGE PAGE](#)



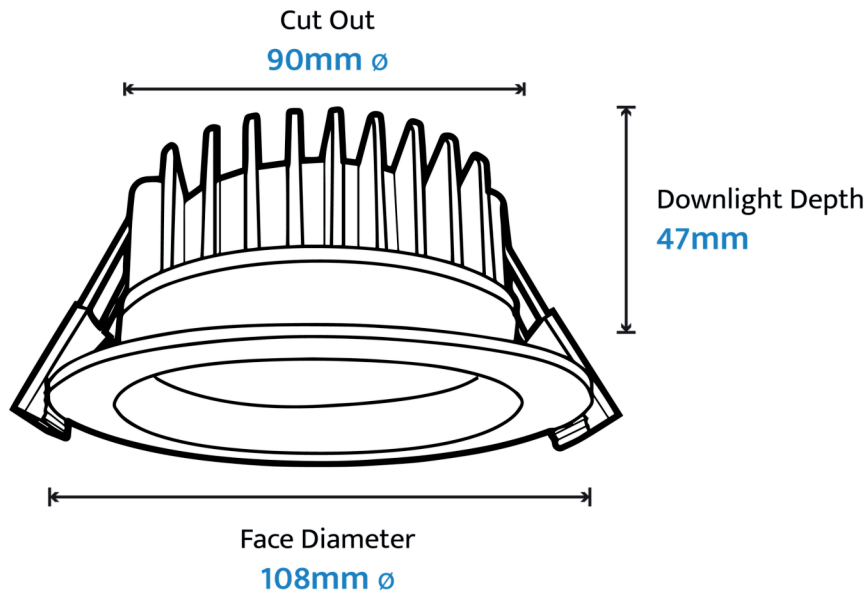

## Zazu ZAZ-9DL-13W Specifications

Light Source	LED   SMD2835	Supply (Voltage)	220-240V AC~50/60Hz
Colours	White	Temperature Rating	-20°C +40°C
Wattage	13W	Construction	Polyamide & PMMA
Dimmable	Yes - Trailing Edge (5% - 100%)	IP Rating	IP44
Kelvins	3000K - 4000K - 6000K	Electrical Protection	Class II
Lumens	1050lm - 1150lm - 1100lm	Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1, AS/NZS 61347.1, AS/NZS 61347.2.13, AS/NZS CISPR 15
CRI	CRI≥83	Recommended Use   Warranty	Domestic / Commercial   5 Year Replacement
LED Hour Rating	50000H   3V	NZ/AU Driver   Driver Type	DC36-72V   Constant C, Non Isolated
Beam Angle	120°	Net Weight   Gross Weight	0.23KG   0.26KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical, dimming and wiring enquiries. For technical support please contact: [customerservice@calibo.com.au](mailto:customerservice@calibo.com.au)

Also available in other configurations



[VIEW RANGE PAGE](#)

