




Breeze Silent Pro DC BD2-448 Specifications

Type	DC Ceiling Fan	Available Accessories	900mm Extension Rod, 38° Raked Ceiling Kit, DC Wall Controller
Colours	Black and White Motor Black and White Blade Options	Speed 1	4,952 m ³ /hr 94 RPM 3.7W
Motor Housing Material	Silicon Steel & Copper	Speed 2	6,770 m ³ /hr 131 RPM 5.86W
Blade Material	ABS Plastic	Speed 3	9,398 m ³ /hr 176 RPM 10.3W
Blade Rotational Diameter	1220mm 48"	Speed 4	10,061 m ³ /hr 192 RPM 17.8W
Quantity of Blades	4	Speed 5	12,439 m ³ /hr 242 RPM 24.7W
Blade Pitch	10 Degrees	Speed 6	13,255 m ³ /hr 263 RPM 31.3W
Raked Ceiling Compatibility	12° with Remote Kit, 38° with accessory	Packaging	
Control Type	6-Speed Remote Control	Motor & Blades	
Reversible	Summer/Winter by Switch on Motor Housing	Net Gross Weight	5.95KG 6.95KG
Test Standard (Compliance)	AS/NZS 60335.2.80:2016 Inc A1:2020 A2:2022 A3:2023 AS/NZS 60335.1:2020 Inc A1:2021 AS/NZS 60598.2.1:2014 Inc A1:2016 A2:2019 AS/NZS 60598.1:2017 Inc A1:2017 A2:2020	Packaging Dimensions	L626 x W288 x H320mm
Indoor or Outdoor	Indoor and Covered Outdoor Installation	Warranty	6 Year Warranty 3 Year In-Home and 3 Year Parts Only


Also available in other configurations

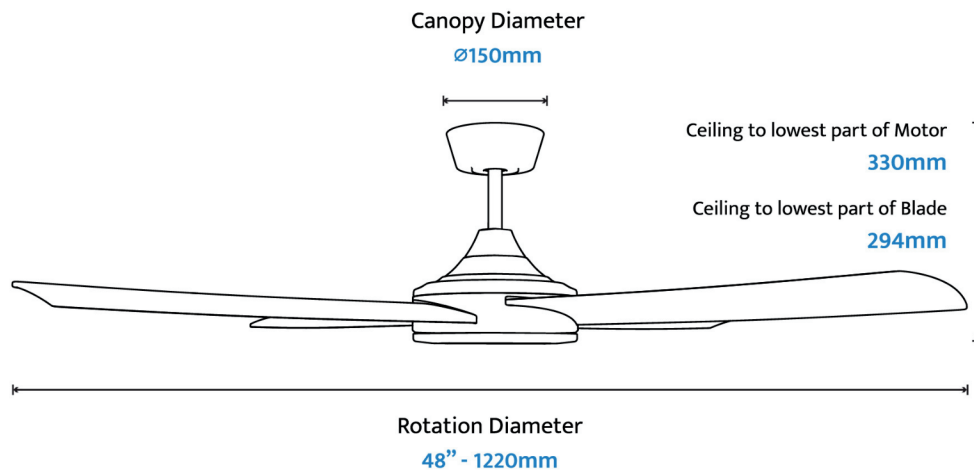

[VIEW RANGE PAGE](#)



All fixtures must be installed by a licensed electrician.
Please also consult a licensed electrician for any electrical and wiring enquiries.
For technical support please contact: customerservice@calibo.com.au

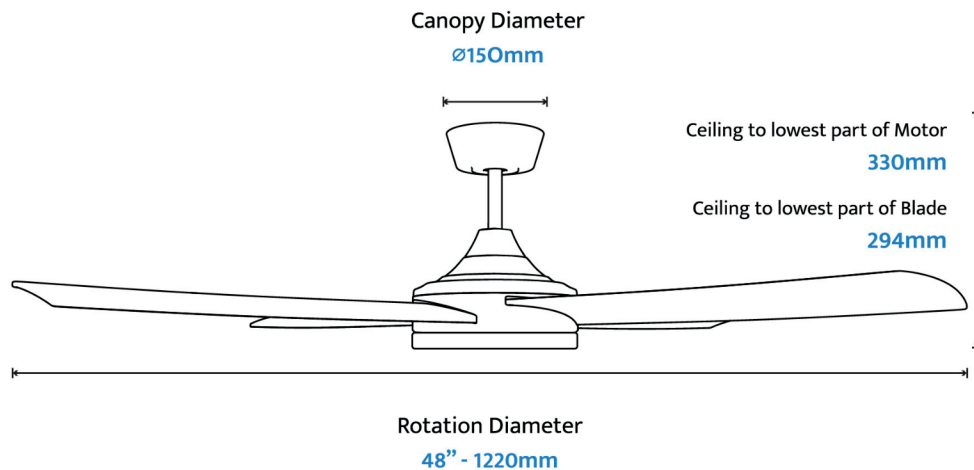

Breeze Silent Pro DC BD2-448-L Specifications

Type	DC Ceiling Fan	Available Accessories	900mm Extension Rod, 38° Raked Ceiling Kit, DC Wall Controller, LED Light Kit
Colours	Black and White Motor Black and White Blade Options	Light Kit Type Light Kit Wattage	LED 22W
Motor Housing Material	Silicon Steel & Copper	Tri-Colour / CCT	Yes
Blade Material	ABS Plastic	Colour Temperature Lumens	3000K - 1361lm 4000K - 1261lm 5000K - 1230lm
Blade Rotational Diameter	1220mm 48"	Dimmable Dimming Capabilities	Yes
Quantity of Blades	4	Speed 1	4,952 m ³ /hr 94 RPM 3.7W
Blade Pitch	10 Degrees	Speed 2	6,770 m ³ /hr 131 RPM 5.86W
Raked Ceiling Compatibility	12° with Remote Kit, 38° with accessory	Speed 3	9,398 m ³ /hr 176 RPM 10.3W
Control Type	6-Speed Remote Control	Speed 4	10,061 m ³ /hr 192 RPM 17.8W
Reversible	Summer/Winter by Switch on Motor Housing	Speed 5	12,439 m ³ /hr 242 RPM 24.7W
Test Standard (Compliance)	AS/NZS 60335.2.80:2016 Inc A1:2020 A2:2022 A3:2023 AS/NZS 60335.1:2020 Inc A1:2021 AS/NZS 60598.2.1:2014 Inc A1:2016 A2:2019 AS/NZS 60598.1:2017 Inc A1:2017 A2:2020	Speed 6	13,255 m ³ /hr 263 RPM 31.3W
Indoor or Outdoor	Indoor and Covered Outdoor Installation	Packaging	
		Motor & Blades	
		Net Gross Weight	6.35KG 7.35KG
		Packaging Dimensions	L626 x W288 x H320mm
		Warranty	6 Year Warranty 3 Year In-Home and 3 Year Parts Only


Also available in other configurations



[VIEW RANGE PAGE](#)



All fixtures must be installed by a licensed electrician.
Please also consult a licensed electrician for any electrical and wiring enquiries.
For technical support please contact: customerservice@calibo.com.au

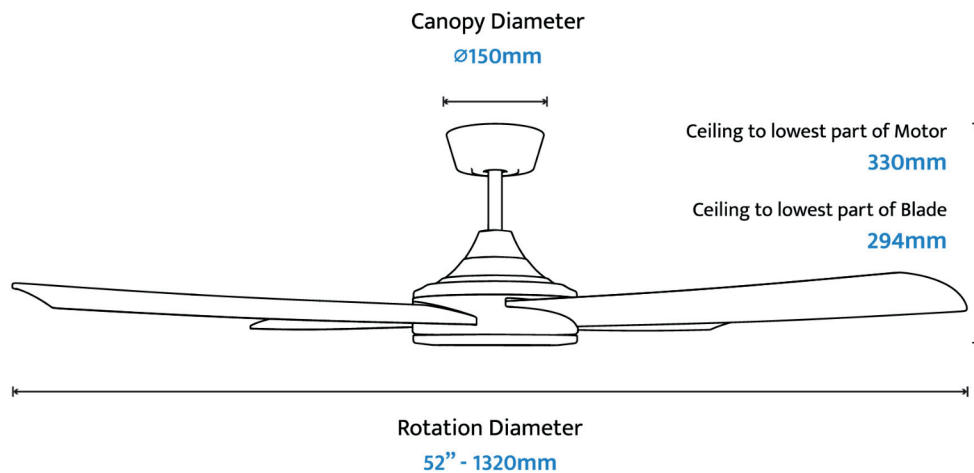

Breeze Silent Pro DC BD2-452 Specifications

Type	DC Ceiling Fan	Available Accessories	900mm Extension Rod, 38° Raked Ceiling Kit, DC Wall Controller
Colours	Black and White Motor Black and White Blade Options	Speed 1	5,295 m³/hr 79 RPM 4.3W
Motor Housing Material	Silicon Steel & Copper	Speed 2	7,461 m³/hr 113 RPM 6.4W
Blade Material	ABS Plastic	Speed 3	10,207 m³/hr 149 RPM 10.72W
Blade Rotational Diameter	1320mm 52"	Speed 4	11,543 m³/hr 171 RPM 18.1W
Quantity of Blades	4	Speed 5	14,032 m³/hr 211 RPM 25.1W
Blade Pitch	10 Degrees	Speed 6	15,065 m³/hr 230 RPM 32.1W
Raked Ceiling Compatibility	12° with Remote Kit, 38° with accessory	Packaging	
Control Type	6-Speed Remote Control	Motor & Blades	
Reversible	Summer/Winter by Switch on Motor Housing	Net Gross Weight	6.05KG 7.05KG
Test Standard (Compliance)	AS/NZS 60335.2.80:2016 Inc A1:2020 A2:2022 A3:2023 AS/NZS 60335.1:2020 Inc A1:2021 AS/NZS 60598.2.1:2014 Inc A1:2016 A2:2019 AS/NZS 60598.1:2017 Inc A1:2017 A2:2020	Packaging Dimensions	L626 x W288 x H320mm
Indoor or Outdoor	Indoor and Covered Outdoor Installation	Warranty	6 Year Warranty 3 Year In-Home and 3 Year Parts Only


Also available in other configurations



[VIEW RANGE PAGE](#)



All fixtures must be installed by a licensed electrician.
Please also consult a licensed electrician for any electrical and wiring enquiries.
For technical support please contact: customerservice@calibo.com.au

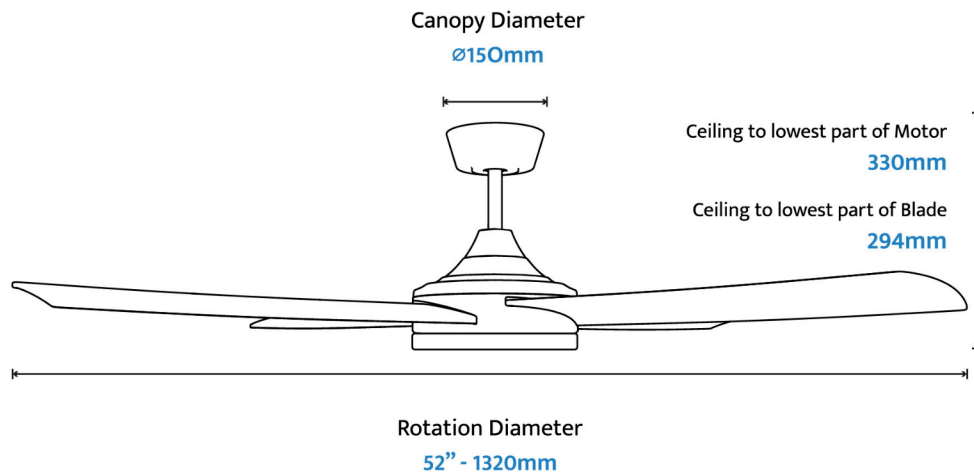

Breeze Silent Pro DC BD2-452-L Specifications

Type	DC Ceiling Fan	Available Accessories	900mm Extension Rod, 38° Raked Ceiling Kit, DC Wall Controller, LED Light Kit
Colours	Black and White Motor Black and White Blade Options	Light Kit Type Light Kit Wattage	LED 22W
Motor Housing Material	Silicon Steel & Copper	Tri-Colour / CCT	Yes
Blade Material	ABS Plastic	Colour Temperature Lumens	3000K - 1361lm 4000K - 1261lm 5000K - 1230lm
Blade Rotational Diameter	1320mm 52"	Dimmable Dimming Capabilities	Yes
Quantity of Blades	4	Speed 1	5,295 m³/hr 79 RPM 4.3W
Blade Pitch	10 Degrees	Speed 2	7,461 m³/hr 113 RPM 6.4W
Raked Ceiling Compatibility	12° with Remote Kit, 38° with accessory	Speed 3	10,207 m³/hr 149 RPM 10.72W
Control Type	6-Speed Remote Control	Speed 4	11,543 m³/hr 171 RPM 18.1W
Reversible	Summer/Winter by Switch on Motor Housing	Speed 5	14,032 m³/hr 211 RPM 25.1W
Test Standard (Compliance)	AS/NZS 60335.2.80:2016 Inc A1:2020 A2:2022 A3:2023 AS/NZS 60335.1:2020 Inc A1:2021 AS/NZS 60598.2.1:2014 Inc A1:2016 A2:2019 AS/NZS 60598.1:2017 Inc A1:2017 A2:2020	Speed 6	15,065 m³/hr 230 RPM 32.1W
Indoor or Outdoor	Indoor and Covered Outdoor Installation	Packaging	
		Motor & Blades	
		Net Gross Weight	6.45KG 7.45KG
		Packaging Dimensions	L626 x W288 x H320mm
		Warranty	6 Year Warranty 3 Year In-Home and 3 Year Parts Only

Also available in other configurations



[VIEW RANGE PAGE](#)



All fixtures must be installed by a licensed electrician.
Please also consult a licensed electrician for any electrical and wiring enquiries.
For technical support please contact: customerservice@calibo.com.au