

# Clayfield DC

48"

1220mm

52"

1320mm

The Clayfield is designed to save you time on every job with revolutionary fast-install features. Snap-in blades, an extra-large hanger bracket, quick-lock canopy, and tool-free wiring connectors mean fewer screws, less fuss, and faster installs - without compromising on performance.

BLACK



**CONTRACTOR  
FRIENDLY**

## From box to breeze in minutes

- ⚡ Snap-in blades for faster assembly
- ⚡ Extra-large hanger bracket - more room, less fuss
- ⚡ Quick-lock canopy - zero screws required
- ⚡ Tool-free wiring connectors for hassle-free install



**BLACK**  
WITH LED LIGHT



**WHITE**




**WHITE**  
WITH LED LIGHT



## Technical Specifications

Installation Location	Indoor and Covered Outdoor
Warranty	6 Year Warranty *2 Year In-Home, 12 Month Wall Controller, Remote and Receiver PLUS 4 Year Parts Upon Product Registration.
Materials	Rust-Free ABS Blades & Diecast Aluminium Motor With Light models includes a Frosted Plastic Light Diffuser.
Operation	6-Speed Wall Controller & Remote Includes 1, 4 and 8 hour timer, <b>sea breeze</b> , <b>security</b> and <b>reverse functions</b> as well as light control (applicable for with light model).
Ceiling Mount Angle	Up to 38° with Raked Ceiling Kit Accessory. Up to 14° without Raked Ceiling Kit Accessory.
Compliance	AS/NZS 60335.1   AS/NZS 60335.2.80   AS CISPR 14   AS/NZS 4268

## Measurements


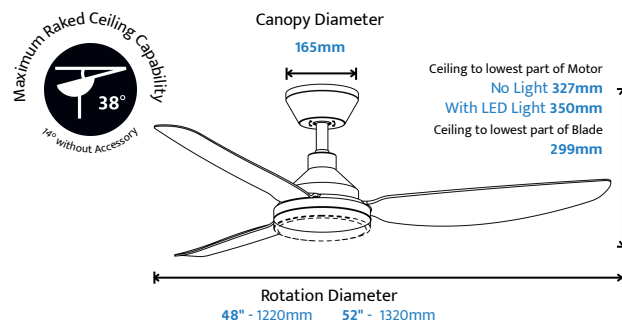


## Performance

	48"	52"
Speed 1	5,760 m3/hr   2.7W   95 RPM	6,000 m3/hr   2.7W   83 RPM
Speed 2	7,500 m3/hr   6.1W   129 RPM	8,220 m3/hr   6.1W   112 RPM
Speed 3	9,180 m3/hr   10.1W   153 RPM	9,720 m3/hr   10.1W   133 RPM
Speed 4	10,800 m3/hr   16W   178 RPM	11,580 m3/hr   16W   153 RPM
Speed 5	11,940 m3/hr   24.9W   204 RPM	13,140 m3/hr   24.9W   173 RPM
Speed 6	13,080 m3/hr   35W   223 RPM	14,400 m3/hr   35W   192 RPM

## Tri-Colour Light Kit

USER REPLACEABLE

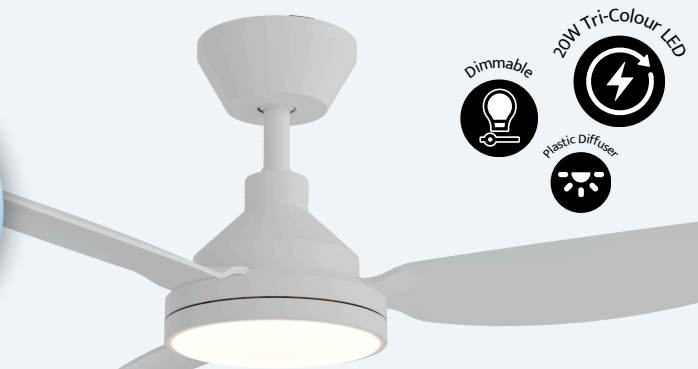

Replacement LED Panel | SOS-LED999



## The calibo™ difference

- Aussie Designed
- Industry Leading Warranties & Local Support
- Highly-Durable Materials made for harsh climates

## Packaging & Accessories

		Motor & Blades	Available Accessories
48"	No Light With LED Light	620 x 270 x 310mm   GW 6KG   NW 3.7KG 620 x 270 x 310mm   GW 6.4KG   NW 4.1KG	900mm Extension Rod   <b>White</b> SOR-900EXT-WH   <b>Black</b> SOR-900EXT-BK 1800mm Extension Rod   <b>White</b> SOR-1800EXT-WH   <b>Black</b> SOR-1800EXT-BK 38 Degree Raked Ceiling Kit   <b>White</b> RCK2126-W   <b>Black</b> RCK2126-B Remote Control   <b>White</b> SOS-RM999 DC Wall Controller   <b>White</b> WCK-SOI-WH
52"	No Light With LED Light	620 x 270 x 310mm   GW 6.2KG   NW 3.8KG 620 x 270 x 310mm   GW 6.7KG   NW 4.2KG	

GW = Gross Weight NW = Net Weight

## Model Numbers

		White	Black
48"	No Light With LED Light	CLA-348-WH CLA-348-WH-L	CLA-348-BK CLA-348-BK-L
52"	No Light With LED Light	CLA-352-WH CLA-352-WH-L	CLA-352-BK CLA-352-BK-L