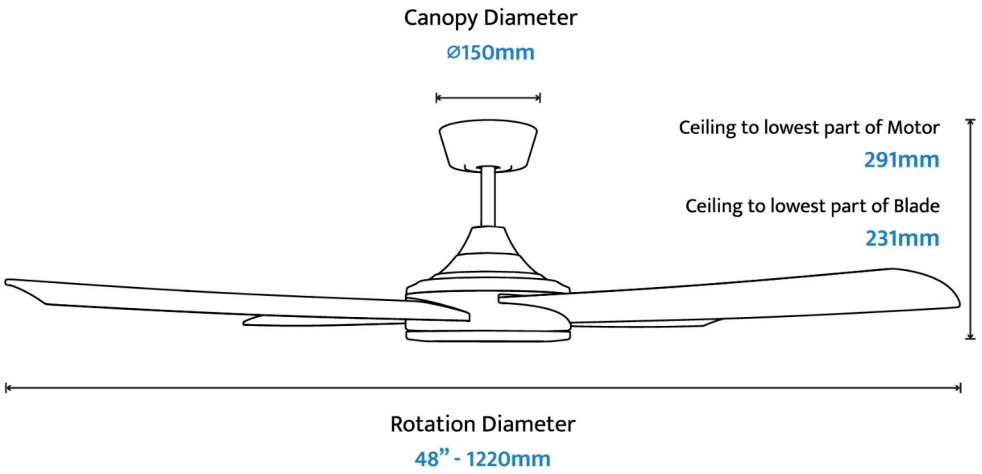


Breeze Silent DC BDC-448 Specifications


Type	DC Ceiling Fan
Colours	Black and White Motor | Black and White Blade Options
Motor Housing Material	Silicon Steel & Copper
Blade Material	ABS Plastic
Blade Rotational Diameter	1220mm | 48"
Quantity of Blades	4
Blade Pitch	14 Degrees
Raked Ceiling Compatibility	13° with Remote Kit, 38° with accessory
Control Type	6-Speed Remote Control
Remote Features	Light Control and 1, 4 and 8 Hour Timer Functions
Reversible	Summer/Winter by Remote
Test Standard (Compliance)	AS/NZS 60335.2.80:2016 Inc A1:2020 A2:2022 A3:2023 AS/NZS 60335.1:2020 Inc A1:2021 AS/NZS 60598.2.1:2014 Inc A1:2016 A2:2019 AS/NZS 60598.1:2017 Inc A1:2017 A2:2020
Indoor or Outdoor	Indoor and Covered Outdoor Installation

Available Accessories	900mm Extension Rod, LED Light Kit, 38° Raked Ceiling Kit
Light Kit Type | Light Kit Wattage	Optional LED Light Kit Accessory | 24W
Tri-Colour / CCT	Yes
Colour Temperature | Lumens	3000K - 2300lm 4000K - 2500lm 6000K - 2400lm
Dimmable | Dimming Capabilities	Yes
Speed 1	4,940 m^3/hr | 94 RPM | 3.7W
Speed 2	5,302 m^3/hr | 133 RPM | 5.86W
Speed 3	7,955 m^3/hr | 176 RPM | 10.3W
Speed 4	9,940 m^3/hr | 215 RPM | 17.8W
Speed 5	11,270 m^3/hr | 242 RPM | 25.1W
Speed 6	13,255 m^3/hr | 263 RPM | 32.1W
Packaging	
Motor & Blades	
Net | Gross Weight	5.5KG | 6.5KG
Packaging Dimensions	L635 x W320 x H290mm
Warranty	6 Year Warranty 3 Year In-Home, 3 Year Parts Only and 12 Months Remote/Receiver

Also available in other configurations

VIEW RANGE PAGE

All fixtures must be installed by a licensed electrician.
Please also consult a licensed electrician for any electrical and wiring enquiries.
For technical support please contact: customerservice@calibo.com.au

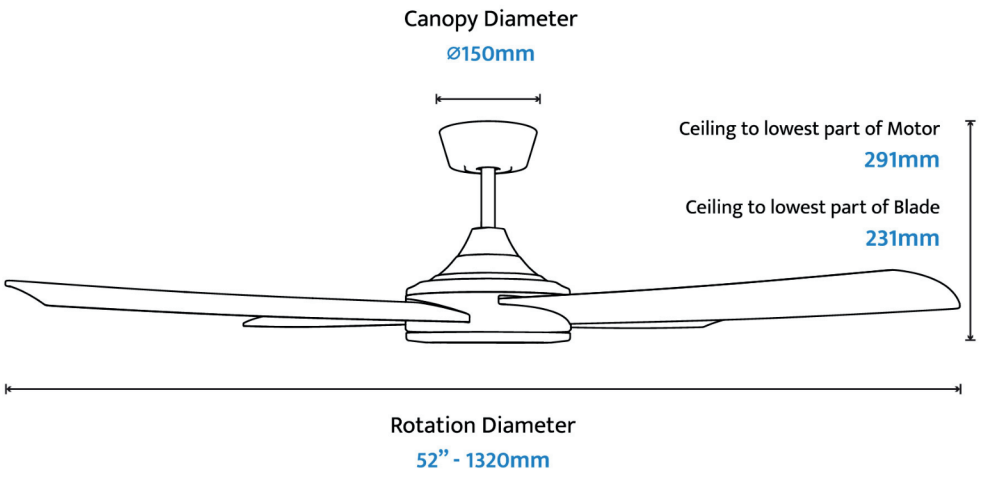

Breeze Silent DC BDC-452 Specifications

Type	DC Ceiling Fan
Colours	Black and White Motor | Black and White Blade Options
Motor Housing Material	ABS Plastic
Blade Material	ABS Plastic
Blade Rotational Diameter	1320mm | 52"
Quantity of Blades	4
Blade Pitch	14 Degrees
Raked Ceiling Compatibility	13° with Remote Kit, 38° with accessory
Control Type	6-Speed Remote Control
Remote Features	Light Control and 1, 4 and 8 Hour Timer Functions
Reversible	Summer/Winter by Remote
Test Standard (Compliance)	AS/NZS 60335.2.80:2016 Inc A1:2020 A2:2022 A3:2023 AS/NZS 60335.1:2020 Inc A1:2021 AS/NZS 60598.2.1:2014 Inc A1:2016 A2:2019 AS/NZS 60598.1:2017 Inc A1:2017 A2:2020
Indoor or Outdoor	Indoor and Covered Outdoor Installation

Available Accessories	900mm Extension Rod, LED Light Kit, 38° Raked Ceiling Kit
Light Kit Type | Light Kit Wattage	Optional LED Light Kit Accessory | 24W
Tri-Colour / CCT	Yes
Colour Temperature | Lumens	3000K - 2300lm 4000K - 2500lm 6000K - 2400lm
Dimmable | Dimming Capabilities	Yes
Speed 1	4,600 m^3/hr | 79 RPM | 4.29W
Speed 2	6,025 m^3/hr | 114 RPM | 6.4W
Speed 3	7,955 m^3/hr | 149 RPM | 17.8W
Speed 4	9,940 m^3/hr | 186 RPM | 24.7W
Speed 5	11,270 m^3/hr | 211 RPM | 31.3W
Speed 6	15,065 m^3/hr | 230 RPM | 31.3W
Packaging	
Motor & Blades	
Net | Gross Weight	6KG | 7.65KG
Packaging Dimensions	L635 x W320 x H290mm
Warranty	6 Year Warranty 3 Year In-Home, 3 Year Parts Only and 12 Months Remote/Receiver

Also available in other configurations

VIEW RANGE PAGE

All fixtures must be installed by a licensed electrician.
Please also consult a licensed electrician for any electrical and wiring enquiries.
For technical support please contact: customerservice@calibo.com.au